User Manual

Lemon iT515

Contents

1 BASIC KNOWLEDGE 5

1.1 INTRODUCTION 5

1.2 SAFETY INFORMATION 5

1.3 SAFETY AND HEALTH PRECAUTIONS 6

1.3.1 General guideline 6

1.3.2 Mobile phone guideline 6

1.3.3 Batteries guideline 7

1.3.4 Charger & accessories 8

1.3.5 Cleaning & maintenance 9

1.3.6 Others 9

2 BEFORE START 10

2.1 PARTS NAMES & EXPLANATION 10

2.1.1 Key pad description 10

2.1.2 Using T-Flash Card 11

2.2 BATTERIES 12

2.2.1 Changing a battery 12

2.2.2 Charging a battery 13

2.3 CONNECTING NETWORK 14

2.3.1 SIM card 14

2.3.2 Insert and remove SIM card 15

2.3.3 Power on or off 15

2.3.4 Unlock the SIM card 15

2.3.5 Unlock the mobile phone 16

2.3.6 Connecting to the network 16

2.4 MAIN SCREEN 16

2.4.1 Idle Screen Icon 16

2.4.2 Status Icon List 17

2.4.3 Applications 17

2.4.4 Define the main screen 19

3 BASIC FUNCTIONS 19

3.1 MAKING A CALL 19

3.2 ANSWERING A CALL 21
3.3 EMERGENCY CALL 21
3.4 OPTIONS DURING A CALL 21
4 INPUT METHOD 22
4.1 GENERAL 22
4.2 INPUT METHOD INSTRUCTION 22
4.2.1 English and number input 22
4.2.2 Handwriting input method 22
5 FUNCTION MENU 23
5.1 USING THE FUNCTION MENU 23
5.1.1 Accessing function menu 23
5.1.2 Accessing function menu by navigation keys 23
5.2 PHONE BOOK 23
5.3 MESSAGES 24
5.3.1 SMS 25
5.3.2 MMS 28
5.3.3 Chat 29
5.3.4 Voice Mail Server 29
5.3.5 Broadcast Message 30
5.4 CALL CENTER 30
5.4.1 Call History 30
5.4.2 General call settings 32
5.5 SETTINGS 34
5.5.1 Dual SIM settings 34
5.5.2 Pen calibration 35
5.5.3 Phone Setup 35
5.5.4 Network Setup 36
5.5.5 Security Setup 36
5.5.6 Restore Factory Settings 39
5.5.7 Sound Effect 39
5.5.8 Display Setup 39

5.5.9 Style setting 40
5.5.10 Shortcuts 40
5.6 MULTIMEDIA 41
5.6.1 Camera 41
5.6.2 Image Viewer 41
5.6.3 Video Recorder 42
5.6.4 Video Player 42
5.6.5 Photo editor 43
5.6.6 Audio Player 43
5.6.7 Sound Recorder 44
5.6.8 FM Radio 45
5.6.9 Schedule FM record 45
5.6.10 Slide show 45
5.7 FILE MANAGER 46
5.8 FUN 46
5.8.1 Java Box 46
5.8.2 Multimedia Space 46
5.8.3 MSN 46
5.8.4 Games 47
5.8.5 Yahoo! 47
5.9 USER PROFILES 47
5.10 ORGANIZER 48
5.10.1 Calendar 48
5.10.2 To Do List 48
5.10.3 Alarm 49
5.10.4 World Clock 49
5.11 SERVICES 49
5.11.1 STK 49
5.11.2 WAP 49
5.11.3 Data account 50
5.12 EXTRA 51
5.12.1 Calculator 51

5.12.2 Unit Converter *51*
5.12.3 Currency Converter *52*
5.12.4 Health *52*
5.12.5 Stopwatch *52*
5.12.6 E-Book Reader *52*
5.12.7 Bluetooth *52*
5.13 RAIDEN 54
5.14 ICE FALL 54
5.15 GOOGLE 54

1 Basic Knowledge

1.1 Introduction

- Thank you for purchasing the Lemon iT515 mobile phone. By reading these guidelines before using your mobile phone you will have an overall knowledge of this mobile phone and understand its simple but outstanding functions.
- The mobile phone is particularly designed for GSM/GPRS networks environment. In addition to the basic function of communication, the mobile phone also provide you with multiple applied functions, which include Bluetooth, name card style phone book, clock/ alarm, to do list, currency converter, calculator, games, audio player, camera, video recorder, sound recorder and so on, to make your work and leisure activities more convenient. Besides, the mobile phone has unique interface and perfect function design to meet your different needs.
- The mobile phone reaches the requirement of GSM/GPRS standard and has passed the qualification of authoritative organizations worldwide.
- Our company keeps the right of modifying the content in the manual without making any notification in advance.

1.2 Safety information

- If your mobile phone is lost or stolen, inform immediately the telecom branch or its outlet to forbid the use of your mobile phone and SIM card, which will help your to avoid the economic loss caused by other's misuse of your mobile phone.
- When you get contact with telecom branch or its outlet, they need to know the IMEI number of your mobile phone, which is marked on the tab on the back of your mobile phone (you can find it with battery taken out). Keep the number for future use.
- Please take precautionary measure to avoid mis-use of your mobile phone. Such as:
  - Set the PIN number of the SIM card, and modify it if others know.
  - When you leave your car, please do not put the mobile phone in a

place easy to be seen. Better take it with your or put it in trunk.

- Set call restriction.

1.3 Safety and health precautions

Read the guidelines before using your mobile phone. Failure to comply with them may be dangerous.

1.3.1 General guideline

- Only use the approved battery and charger. Other products may lead to leaking, over heat, explosion, and fire.
- Do not drop, knock, or shake the mobile phone. Rough handling may cause damage to the mobile phone or fire.
- Do not place mobile phone, battery, or charger in the microwave oven or high pressure equipment. Doing so may break the internal circuit boards or cause a fire.
- Do not use mobile phone in any area with a potentially explosive or flammable atmosphere. Using mobile phone in such area could cause a fire or explosion.
- Do not keep mobile phone in hot, humid, or dusty areas, as its moving parts may be damaged.
- Keep your mobile phone out of the reach of children. Do not let children play with mobile phone to avoid accident injury.
- Do not leave mobile phone on unstable or uneven place. Such condition may result in mobile phone falling.

1.3.2 Mobile phone guideline

- Switch off your mobile phone before boarding an aircraft or in hospital and any other facility where posted notices require you to do so. Mobile phone effects the electronic equipments and medication equipments. The mobile phone has auto switch on function, please check your alarm setting, and make sure the mobile phone will not switch on automatically during the flight.
- Certain electronic equipment may not be shielded against the RF signals from your wireless phone, such as hearing aid, pacemakers, other medical devices, fire sensor, auto gate, and others. For the satisfactory operation of the equipment and for the

safety of personnel, please consult the manufacturer or local sales outlet to discuss alternatives.

- Do not put hard pressure or hit on the screen. Rough handling can break the internal circuit board and the screen. The liquid from screen can dangerous human eyes. Please wash eyes with water immediately and go to hospital for further exam if the liquid is in eyes.
- Do not modify or dismantle the mobile. Unauthorized modify or dismantle will result in damaging the mobile phone.
- In some cases, mobile phone has side effect to the vehicle carried electronic equipments. Please do not use mobile phone under that circumstance. Failure to observe these instructions may lead to the denial of legal right.
- Do not operate mobile phone with sharp object such as needle or ball pen. Sharp object will damage mobile phone or lead to malfunction.
- Please do not use mobile phone which wire is damaged. Otherwise it will be dangerous to the user.
- Please do not place mobile phone close to magnetic objects. Mobile phone can eliminate the information from disc, credit card and other cards.
- Please keep small metal objects away from mobile phone's ear phone. The speaker has magnetism and attract small metal objects which has potential to damage itself and the one who use it,
- Precipitation, humidity, and liquids will corrode electronic circuits. Keep the phone dry.

1.3.3 Batteries guideline

- Please keep mobile phone away from fire. Fire will damage the batteries and lead to explosion.
- During changing batteries, hard pressure will cause the batteries leaking, over heated, explosion and caught fire.
- Do not short-circuit the battery. Accidental short circuiting can occur when a metallic object (wire line, clip) or necklace connect

two terminals. Short circuit may damage the battery.

- Please do not weld the battery's terminal. Welding the battery will damage it.
- The battery liquid is dangerous to human eyes. Please wash eyes with water immediately and go to hospital for further exam if the liquid is in eyes.
- Do not modify or dismantle the battery. Unauthorized modify or dismantle will result in damaging the mobile battery.
- Do not place batteries in or on the microwave oven or over heated places. That may damage the battery.
- During charging, using or storing, if batteries temperature rise, color change, or deformed, please stop using and replace with new battery.
- If the battery liquid is leaking or smelly, please remove it from fire to avoid explosion.
- Please keep battery away from humidity. Humidity will cause over heat, corrosion of the batteries.
- Please do not leave the battery in hot places such as in a car in summer as you will reduce the capacity and life time of the battery.
- Please do not leave the battery on charger for over 24 hours

1.3.4 Charger & accessories

- Please control the charger output voltage below 5.2 V to avoid the voltage being too high to damage the phone.
- Please charge with dedicated voltage. Using mismatched power will damage the mobile phone and charger.
- Short circuit charger is forbidden. It will cause electric shock and damage the charger.
- If the power line is damaged, please do not use the charger.
- Please keep the charger free from dust all the time.
- Keep charger away from liquid. Spilled liquid will dangerous the charger.
- If charger has close contact with liquid, take off the charger from socket immediately to prevent further damage.
- Do not modify or dismantle the charger. Unauthorized modify or

dismantle will result in damaging the charger or personnel.

- Please do not charge in humidity place. Humidity will cause over heat, corrosion of the batteries.
- Do not touch the charger, power line or socket with wet hands. Doing so may give you an electric shock or damage the phone
- Do not store heavy article on top of power line or dismantle it. Doing so will cause electric shock and fire.
- Unplug the charger from socket before cleaning and maintenance.
- Take the terminal to unplug the charger. Pulling the power line to unplug will damage the charger and cause electric shock or fire.

1.3.5 Cleaning & maintenance

- Mobile phone, batteries, and charger are not water proof. Please do not use them in humidity place such as shower room. Avoiding spilled by rain.
- Clean mobile phone, batteries, and charger with soft fabric.
- Do not use harsh chemicals, cleaning solvents or strong detergents to clean the mobile phone.
- Please clean the socket regularly. Dirt will make the charger malfunction.

1.3.6 Others

Mobile phone:

- Please always keep the phone at room temperature between 5 degree to 40 degree and humidity between 35% ~ 85%.
- Please keep mobile phone away from telephone, TV, Radio and other office electronic appliances. Mobile phone will have side effect over such equipments.

Batteries:

- Keep batteries away from direct sun shine. Keep batteries in cooling place with good ventilation
- Lifespan of batteries are limited. The stand by time of the batteries will be shortening after frequent charging. When the operation time is noticeable shorter than normal, the batteries are worn out. It is time to buy a new battery.

- Dispose of used batteries in accordance with location regulation. Always recycle. Do not dispose of batteries with normal daily waste.

Charger:

- Please do not charge in the following places: under direct sun shine, temperatures below between 5 degree to 40 degree place, humidity or dusty place, vibrate place, place close to TV, radio or other appliances.

2 Before start

2.1 Parts names & explanation

2.1.1 Key pad description

Left Soft Key

In idle mode, press it to go to Menu. In edit screen, press it to select and confirm.

Right Soft Key

In idle mode, press it to get into phonebook. In edit screen, press it to clear and cancel.

Send1 Key

Press it to make a call or answer a call. Press it in idle mode to show "SIM1 Call logs" for Send1 key and "SIM2 Call logs" for Send2 key. When the phone has been inserted two SIM cards, press it to dial with SIM1 in dialing status.

Send2 Key

Press it to make a call or answer a call. Press it in idle mode to show"SIM1 Call logs" for Send1 key and "SIM2 Call logs" for Send2 key. When the phone has been inserted two SIM cards, press it to dial with SIM2 in dialing status.

End Key

Press it to hang up the call or reject the call. Press it idle mode to lock the keyboard. Press it in edit screen to get back to idle mode. Hold it to turn on or off the phone.

OK Key

In idle screen hold OK key to turn ON the flash light to work as torch light. Press it in edit screen to select and confirm.

Navigation Keys

Use as shortcuts key in idle mode.

MP3 Key

Press it to Audio player in idle mode.

Camera key

Camera key is at the right side of phone. Press it in idle mode to use the camera. Press it to silent while receiving a call.

Volume keys

Volume keys are at the right side of phone. Press them in idle mode to adjust the ringtone volume. Press them to adjust the volume in some interface. Press them in menu to scroll the cursor.

Attention:

PRESS means press the key for short time then loosens. HOLD means press the key for more than 2 seconds.

2.1.2 Using T-Flash Card

You can use T-Flash card to enlarge your phone's memory capacity. The memory card slot is below the battery.

Insert T-Flash card

1. Slide up the fixture and put it up.
2. Put the card into the slot with the label side face up.
3. Put the fixture down and slide down to lock.

Remove T Flash card

1. Slide up the fixture and put it up.
2. Get the card out.
3. Put the fixture down and slide down to lock.

***Attention*:**

- Frequent erasing and writing will shorten a memory card's lifespan.
- Do not remove a memory card from the phone or turn off the phone while data is being accessed or transferred. This could result in loss of data and/or damage to the card or phone.
- Do not subject memory cards to strong shocks.
- Do not touch memory card terminals with your fingers or metal objects. If dirty, wipe the card with a soft cloth.
- Keep memory cards away from small children or pets.
- Do not expose memory cards in a place subject to electro static discharge and/or electrical noise.

2.2 Batteries

Batteries have been charged to 50% full. It can be used after unpack. The first three times batteries must be totally discharged before charging. It will help to prolong the batteries lifespan and working quality.

2.2.1 Changing a battery

Please follow the steps to remove the battery:

- Push the back cover backward.
- Lift the battery up to remove it.

Please follow the steps to install a battery:

- Place the top part of the battery to connect with grooves on the phone.
- Push the battery downward till it clicks into place.

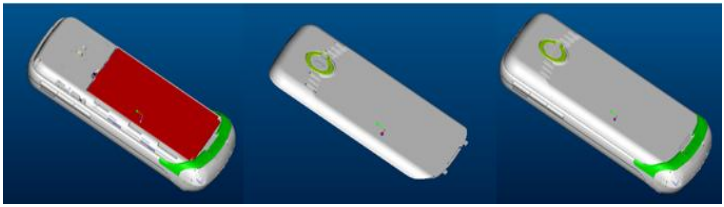

2.2.2 Charging a battery

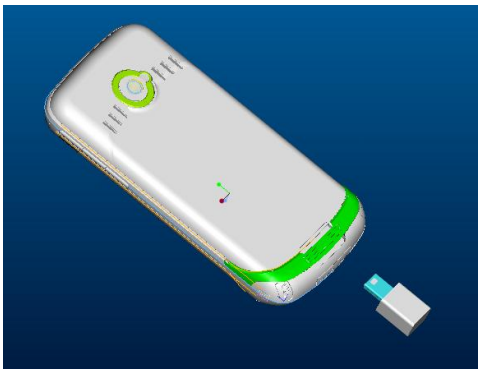

Plug the charger into the socket.

Connect the adapter into the phone.

- Battery charging indicator sign will flash; if mobile phone is switch off during charging, the indicator sign will show on the screen. If the battery is too weak, the charging indicator sign will not show immediately after the charger plugs in.
- When charging indicator sign shows the battery is full and stop flashing, charging is finished. If charge when switch off, the screen shows charging finished. The charging will last for a few hours. It is normal that the battery, mobile phone, and charger's temperature rise. Disconnect the mobile phone, charger, and socket after

charging finish.

***Attention*:**

- Please always charge the battery at place temperature between 5 degree to 40 degree. Use only the supplied charger. Unauthorized charger may damage the phone and violate regulation and guarantee.
- When mobile phone switch off due to out of power or the indicator sign shows run low battery, charge the battery in time. Battery charging time depends on the remaining battery charge.
- The stand by time and call time of this mobile phone is tested in an idealistic environment. In reality it is greatly affected by the signal strength o the cellular network, working environment and other factors
- Do not remove the battery during charging. Please make sure the battery is in place before charging.
- When charging is finished, unplug the adapter from the power outlet and from the phone.
- If you do not unplug the adapter from the power outlet and from the phone, after 5 to 8 hours, the phone will start charging again due to the failure of battery power. We strongly suggest no to do so. It will shorten the lifespan of batteries.

2.3 Connecting network

2.3.1 SIM card

- Please insert the SIM card before switch on the mobile phone. SIM card is the key to GSM network.
- When you subscribe to a cellular network, the plug-in SIM card loaded with our subscription details such as your call history, call record, messages and others. SIM card can be removed and inserted into any GSM mobile phone (new mobile phone can read SIM card simultaneously)
- The plug-in SIM card and its contacts can be easily damaged by scratches or bending, please keep SIM card away from electric, magnetic objects. Once the SIM card is damaged, it will loss the

accessibility to GSM network.

Warning: Switch off the mobile phone before remove the SIM card. It is forbidden to remove the SIM card when the power resource is connected.

2.3.2 Insert and remove SIM card

Handle the SIM card with care.

Insert SIM card

- Switch off mobile phone and remove external electrical source.
- As shown on the picture, insert SIM card into the SIM card slot.

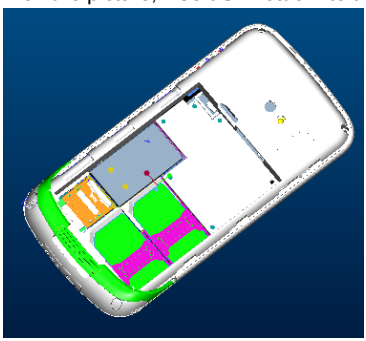

Remove SIM card

- Switch off the mobile phone and remove electrical source.
- As shown on the picture, slide the SIM card out from SIM card slot to remove it.

2.3.3 Power on or off

Power on: hold the **End key** to turn on the phone. If necessary, enter the PIN and phone password then press **OK key**.

Power off: hold the **End key**.

2.3.4 Unlock the SIM card

To eliminate unauthorized usage, SIM card can be locked by adding PIN number. Once select this function, PIN must be input every time the mobile is switch on. If user does not set SIM card protection method, SIM card can not

be protected from unauthorized usage.

- Press **End key** to switch on.

Input PIN number, use **Right soft key** to erase wrong input. Press **OK key** to finish. For example, if PIN is 1234, then please input 1234.

If wrong input for 3 times, the SIM card will be locked by the network. It requests PUK1 number, if you do not know PUK1 number, please do not input yourself. Give the SIM card to cellular network service to deal. Detail information please refer Security setting

Attention:

The network supplier will set a standard PIN (between 4 to 8 digitals) for your SIM card. Please change it to your personal pass word. For detail please see Security setting

2.3.5 Unlock the mobile phone

Please set pin number to protect your mobile phone from unauthorized usage. Once select this function, pin number must be input every time the mobile is switch on. If user does not set pin number protection method, the mobile phone can not be protected from unauthorized usage

- Input mobile phone password, use **Right soft key** to erase wrong input. Press **OK key** to finish. For example, if the password is 1122, then please input 1122
- If you forget the mobile phone password please contact the local sales branch or service centre to unlock the mobile phone. (Default mobile phone password is "0000")

2.3.6 Connecting to the network

After the SIM card is unlocked, the mobile phone searches for network service. Once connected, the cellular service provider will show on the centre of the screen. The mobile phone is at idle stage and can make or receive a call.

Attention: If ONLY EMERGENCY shows on the screen, it means you are not in the service area of the network only the EMERGENCY call can be connected.

2.4 Main Screen

Press Left soft key in idle mode to main menu.

2.4.1 Idle Screen Icon

There are 4 icons in idle mode at the bottom of the screen.

Main Menu Dial Screen Messages Phone Book

2.4.2 Status Icon List

There is a status bar at the top of the screen. The status bar will show different icons to indicate some information to user.

	SIM1/SIM2 Network signal intension
	SIM1/SIM2 Unread message
	SIM1/SIM2 Missed call
	SIM1/SIM2 Roaming
	SIM1/SIM2 Call divert
	SIM1/SIM2 Unread MMS
	SIM1/SIM2 MMS Sending
	Keypad locked / unlock
	Bluetooth
	Alert Type - Ring
	Alert Type - Vibration Only
	Alert Type -Vibra and Ring
	Alert Type - Vibra then Ring
	Plug handsfree
	Set and start alarm
	Battery

2.4.3 Applications

Touch or press **Left soft key** to application interface.

Touch any application icon to get started.

	Call		Files
	Phonebook		Fun
	Message		Java
	SMS		Facebook
	Write sms		Ebuddy
	MMS		Operamini
	Speed Dial		MSN
	Mode		Games
	Setting		Yahoo
	Time and Date		Profile
	Sched. Power On/Off		Organizer
	Security		Calendar
	Display		To do
	M-media		Alarm
	Camera		Time zone
	Album		Services
	VideoRec		Browser
	Video		Extra
	MP3		Calculator
	Recorder		Rate
	FM		Stopwatch

	Raiden		E book
	Ice Fall		Bluetooth
	Google		Shortcuts

2.4.4 Define the main screen

You can define the icons position. The icons can be arranged to many main screens.

The menu bar at the bottom of the screen can be arranged with four usually applications. The icons in menu bar will not change with screen moving.

Arrange the icons :

1. Press any icon in main screen until the icons shaking.
2. Drag the icon to the location.
3. Press **End key** to save the arrangement.

Change to other screen :

Slide you finger left or right to change the screen.

3 Basic functions

3.1 Making a call

When cellular network service provider shows on the screen, you can receive or make a call through network. The received signal strength is shown

on the up left corner of the screen (maximum 4 lines—best signal condition).

The quality of network connection is affected by the environment. Moving within small scale can improve the network connection quality.

In Idle mode, touch dial icon to show the number keyboard.

Attention: the interface will be different if the Smart Dialing function has turned on.

Dail with SIM 1

Dail with SIM2

Save the number to phoneor SIM card

Delete

View Call History

View Phonebook list

Voice Mail Server

Back to idle mode

To make a call, enter the phone number, including the area code, and then press **Send1/2 key** to dial. You can also touch the icon or to dial.

Tips: For informational calls, add the + character that replaces the international access code, and enter the country code, area code (omit the leading 0, if necessary), and phone number. Touch continuously to input + character.

To make a call using the saved contacts, touch. . Select the contact

and press **Send1/2 key** to dial with different SIM card. You can also touch in idle mode to select the contacts.

To make a call using the log, touch to call logs. You can also press **Send1/2 key** or touch in idle mode to view the detail call history.

To adjust the volume of an active call, use the **Volume keys**.

3.2 Answering a call

To answer a call, press **Send1/2 key** or select **Options -> Answer**.

To reject a call, press **End key** or select **Reject**.

To adjust the ringing tone, press the **Volume keys**.

To silent, press **Camera key**.

If any key to answer is switched on, you can press any key to answer it (except **End key**, **Right soft key**, and **Camera keys**). Otherwise press **Send key1/2** or **Left soft key** and select **Answer** to answer a call. If the ear phone is connected, you can answer a call though ear phone.

3.3 Emergency call

If you are in the area not covered by network service, you would be able to make Emergency. If the cellular network service does not cover that area, ONLY EMERGENCY shows on the screen. That means you are not in the service area of the network only the EMERGENCY call can be connected. If you are in area covered by network service, the Emergency call can be made without inserting SIM card.

3.4 Options during a call

During the call, you can press **Right soft key** to switch between hand-free mode and normal mode. Press **Left soft key** to get into option menu. The option menu is similar with Function menu. It is only possible to get into option menu during a call. The functions such as on hold, forward or making a multiparty call need network support. Please contact your network service provider for detail.

- **Magic Sound Status**: select to open or close the magic sound effect which can setup in **General call settings.** See **chapter 5.4.2.6**.

- **Hold single call**: put the call on hold or recover it.
- **End single call**: end the call.
- **New call**: make a new call.
- **Phonebook**: go to **Phone Book**.
- **Message center**: go to **Messages**.
- **Sound recorder**: record the conversation.
- **Mute**: press **Left soft key** to turn on or off.
- **DTMF**: press **Left soft key** to turn on or off.
- **Multiparty call**: the function need network support. Please contact your network service provider for detail.

***Attention*:** Some options are available under certain condition. Such as Switch only can be used when there are more than one call are connected at the same time.

4 Input Method

4.1 General

The mobile supports normal English input method, number input method, handwriting input method, and symbols input method.

4.2 Input method instruction

4.2.1 English and number input

General operation for English input

- Touch the corresponding letter to input the letter.
- Touch input space.
- Touch delete the letter.
- Touch change to symbols keyboard.
- Touch change the input methods.

4.2.2 Handwriting input method

You can use the touch pen to write the character or symbol on the touch screen in any input method mode. Use the touch pen to write letter, number, or symbol, and then touch the correct input from the alternative word choices.

5 Function Menu

***Attention*:**

- Some menus of SIM2 will disappear if no SIM2 card. All the following listed menus and options are in the case of two SIM cards.
- Some menus only appear under circumstance.

5.1 Using the function Menu

5.1.1 Accessing function menu

- Press **Left soft key** in idle mode to main menu. Touch any application icon to get started.
- In sub menus, press **Up/Down key** to select and press **Left soft key** or **OK key** to access. Press **Right soft key** to exit current menu. Press **End key** get back to idle mode.

5.1.2 Accessing function menu by navigation keys

For the convenience of users, the navigation key can be set as shortcuts key in idle mode.

- In Idle mode, press **Up key** to **Audio Player**.
- In Idle mode, press **Down key** to **Write Message**.
- In Idle mode, press **Left key** to **User Profiles**.
- In Idle mode, press **Right key** to **Tone Setup**.

The above as the system default setting, the user can reset them according to their habit. Please refer to chapter **5.5.3 Dedicated key** and **5.5.10 Shortcuts**.

5.2 Phone book

Touch the icon ”Phonebook” in idle mode to this menu.

You can save names, mobile phone number, fixed line number, work place phone number and other information by Phone book function. From Main Menu, select Phonebook to get into phonebook options. Press **Right soft key** in idle mode to view the Phonebook list.

***Attention*:**

The phone can save 1000 entries at most. The SIM card storage capacity is different. Please contact your service provider for detail.

- **Quick Search**: select this option to get into phone book screen. There is an input space down the bottom of the screen. Input information as searching criteria
- **Search Entry**: search entry according to names in the phonebook.
- **Add New Entry**: add a new entry into phonebook. You can select to save in phone's memory or SIM card. The saving form is slightly different.
- **Copy All**: copy all entries in phone's memory or SIM card. You can select from Phone to SIM card or from SIM card to Phone or from one SIM card to another SIM card.
- **Delete**: delete the entry. Select to delete all record from SIM card or phone's memory. Select to delete record one by one from SIM card or phone's memory.
- **Caller Group**: this set provides 5 call groups for you. You can change the group name and select the caller picture, video, ringtone and the group member.
- **Extra Number**: set the extra numbers that saved in SIM card such as own number and service dialing number.
- **Settings**
  - **Memory status**: view the memory status of SIM card and phone's memory.
  - **Preferred storage**: select the prioritized place to save, SIM card or phone.
  - **Fields**: set the content of name card in phonebook.
  - **My vCard**: edit owner's name card and send it.
  - **vCard version**: select the card version.
- **Caller Picture**: select a picture to display when receiving a call.
- **Caller Ring Tone**: select a ring to play when receiving a call.
- **Caller Video**: select a video to play when receiving a call.

5.3 Messages

Touch the icon "Message" in idle mode to this menu.

5.3.1 SMS

Touch the icon ”SMS” in idle mode to this menu directly.

5.3.1.1 Inbox

This menu includes **SIM1 Inbox** and **SIM2 Inbox**. All the operations are same.

- This folder stores all the messages you have received.
- Press **Left Up/Down key** to choose a message and press **OK** to read it. Then you can press **Options** to access the following options:
  - **Reply**: reply to the sender.
  - **Delete**: delete the message.
  - **Edit**: edit the message.
  - **Forward**: forward the message to other people.
  - **Copy to Phone/SIM**: copy the message between the SIM card and the phone’s memory.
  - **Move to Phone/SIM**: move the message between the SIM card and the phone’s memory.
  - **Delete All**: delete all messages in Inbox.
  - **Copy All**: copy all the messages between the SIM card and the phone’s memory.
  - **Move All**: move all the messages between the SIM card and the phone’s memory.
  - **Use Number**: extract numbers from the message. You can choose one to dial or save to phonebook.
  - **Use URL**: extract URLs from the message. You can connect the link in the message.
  - **Save Objects**: extract the sound and picture of EMS.

5.3.1.2 Outbox

This menu includes **SIM1 Outbox** and **SIM2 Outbox**. All the operations are same.

- This folder stores messages that the phone is attempting to send or has failed to send.

- Press **Left Up/Down key** to choose a message and press **OK** to read it. Then you can press **Options** to access the following options:
  - **Send from SIM1/SIM2**: send the message with SIM1/SIM2. You can choose send or send to groups.
  - **Edit**: edit the message.
  - **Delete**: delete the message.
  - **Copy to Phone/SIM**: copy the message between the SIM card and the phone's memory.
  - **Move to Phone/SIM**: move the message between the SIM card and the phone's memory.
  - **Delete All**: delete all messages in Outbox.
  - **Copy All**: copy all the messages between the SIM card and the phone's memory.
  - **Move All**: move all the messages between the SIM card and the phone's memory.
  - **Use Number**: extract number from the message. You can choose one to dial or save to phonebook.
  - **Use URL**: extract URLs from the message. You can connect the link in the message.

5.3.1.3 Write Message

Touch the icon "Write sms" in idle mode to this menu directly.

- Enter you message. The maximum number of characters allowed in a short message varies by service provider. If your message exceeds the maximum number of characters, the phone will split the message.
- Press **Options** to access the following options for creating a message.
  - **SIM1/SIM2 done**: finish the message, ready for next step, you can choose SIM1 or SIM2.
  - **Use Templates**: insert a message template.
  - **Insert Object**: inset a picture, sound, or animations to the message.

- **Format Text**: change the text attributes.
- **Insert PHB Number**: insert the number which saved in the phonebook.
- **Insert PHB Name**: insert the name which saved in the phonebook.
- **Insert Bookmark**: insert the bookmark which saved in WAP.
- **Input Method**: change the input method while editing.

- After finishing, select **SIM1 / SIM2 Done**, press **Up/Down key** to choose send or save mode.
  - **Send Only**: send the message, select this option to get into receiver screen, and then input the number or search in phone book to find the number. Press **OK** to send.
  - **Save and Send**: save a copy of the message in Outbox and send the message.
  - **Save**: save the message in Outbox.
  - **Send To Many**: send the message to more than one recipient.
  - **Send By Group**: select a call group and send the message to all members of the group.

5.3.1.4 Template

Save some frequent used terms to avoid typing in the same terms many times. From the text template list, press **Options** to access the following options:

- **Edit**: edit the template.
- **Erase**: delete the template.
- **Write Message**: create and send a new message.

5.3.1.5 Message Settings

Use this menu to set up various options for using the messaging service. This menu includes **SIM1 message settings** and **SIM2 message settings**. All the operations are same.

- **Profile Setting**: select appropriate mode for message. Different mode has different setting in folder name, service center number, expired date, form and other features.
- **Common Setting**

- **Delivery Report**: set the network to inform you when your messages have been delivered.
- **Reply Path**: allow recipients to reply to you through your SMS server.

Attention: this function is only available with service provider's support.

- **Memory Status**: show the memory status of SIM card and phone's memory.
- **Preferred Storage**: select the preferred storage.

5.3.2 MMS

Touch the icon "MMS" in idle mode to this menu directly.

Multimedia Message Service (MMS) delivers messages containing a combination of text, image, video, and sound, from phone to phone.

- **Write Message**: write a new MMS.
- **Inbox**: this folder stores all the MMS you have received.
  - **View**: play the MMS.
  - **Reply by MMS**: reply to sender via MMS.
  - **Reply by SMS**: reply to sender via SMS.
  - **Reply to all**: reply to all recipients of the message.
  - **Forward**: forward the MMS to other people.
  - **Delete**: delete the MMS.
  - **Delete All**: delete all MMS in the Inbox.
  - **Save as template**: save the MMS as a template.
  - **Properties**: show the detail information of the MMS.
  - **Use details**: extract the numbers, pictures, sounds, or URLs from the MMS.
- **Outbox**: where to save the messages that have been sent.
  - **View**: play the MMS.
  - **Forward**: forward the MMS to other people.
  - **Edit**: edit the MMS.
  - **Delete**: delete the MMS.
  - **Delete All**: delete all MMS in the Outbox.
  - **Save as template**: save the MMS as a template.

- **Properties**: show the detail information of the MMS.
- **Use details**: extract the numbers, pictures, sounds, or URLs from the MMS.

- **Drafts**: to save the message before sending; after sending the message will be moved to Outbox.
  - **View**: play the MMS.
  - **Send**: send the MMS.
  - **Edit**: edit the MMS.
  - **Delete**: delete the MMS.
  - **Delete All**: delete all MMS in the Draft.
  - **Save as template**: save the MMS as a template.
  - **Properties**: show the detail information of the MMS.
  - **Use details**: extract the numbers, pictures, sounds, or URLs from the MMS.
- **Template**: you can access embedded MMS templates or ones you have saved so that you can use them in composing an MMS message.
- **Message Settings**: you can configure MMS settings.
  - **Compose**: set the items of MMS.
  - **Send**: set the items while sending.
  - **Retrieve**: set the items while retrieving.
  - **Filter:** set the filter while receiving.
  - **Server Profile**: set the network service.
  - **Memory Status:** show the memory status.

5.3.3 Chat

Use this menu to chat with other people by message. The sent and received messages will be display in a chat room. You can chat with two people at the same time. Select one chat room and set before using, press **Options** to access the following options:

- **Chat room info**
  - **My nickname**: enter your nickname while chatting.
  - **Destn. Number**: enter the number of other people.
- **Start new**: start to chat.

5.3.4 Voice Mail Server

Use this menu to store the number of the voicemail server and access your voicemails. This menu includes **SIM1 voice mail server** and **SIM2 voice mail server**. All the operations are same.

- **Edit**: edit the voicemail server number and server name.
- **Connect to Voice**: connect to the voicemail server to listen to your messages.

5.3.5 Broadcast Message

Use this menu to change the settings for receiving CB messages. This menu includes **SIM1 broadcast message** and **SIM2 broadcast message**. All the operations are same.

- **Receive Mode**: enable or disable the reception of broadcast messages.
- **Read Message**: select the menu to access to the broadcasting message you ordered.
- **Languages**: select the languages in which broadcast messages display.
- **Channel Setting**: specify the channels from which you receive broadcast messages.

Attention: the broadcasting messages are provided by network service provider. Please contact your service provider for details.

5.4 Call center

Touch the icon ”Call center” in idle mode to this menu.

Your mobile phone can save each 20 records for miss calls, received calls, and dialed calls. Through this menu you can search for all history records.

5.4.1 Call History

This menu includes **SIM1 call history** and **SIM2 call history**. All the operations are same.

5.4.1.1 SIM1 call history:

- **SIM1 missed calls**: touch **OK** to go show the list.

  Press **Up/Down key** to select the number in the list and then press **OK** to see the detail information.

Under detail information menu, press **Option** to carry on the following functions:

- **Delete**: delete the current record.
- **Save to Phone book**: save the number into SIM card or phone.
- **Dial**: select the SIM card to dial the current number. If there is only one SIM card in the phone, the phone will dial the number directly.
- **Edit**: edit the current number and then dial directly. You can also press **OK key** to select saving it into phonebook or dialing.
- **Send SMS**: edit a SMS and send to the current number.
- **Send MMS**: edit a MMS and send to the current number.

- **SIM1 dialed calls**: the same operations with SIM1 missed calls.
- **SIM1 received calls**: the same operations with SIM1 missed calls.
- **Delete SIM1 call logs**: select to empty the selected call history folder or all the call history.
- **SIM1 call time**: This menu displays the time log for calls made and received. The actual time invoiced by your service provider will vary.
  - **Last Call Time**: check the length of your last call.
  - **Total Sent**: check the total length of all the calls you have dialed.
  - **Total Received**: check the total length of all the calls you have received.
  - **Reset All Time**: reset the call timers.
- **SIM1 call cost**: This network feature displays the cost of calls.
  - **Last Call Cost**: check the cost of your last call.
  - **Total Cost**: check the total cost of all of your calls. If the total cost exceeds the maximum cost set in Set max cost, you must reset the counter before you can make another call.
  - **Reset Cost**: input PIN2 then reset the cost counters.
  - **Max Cost**: input PIN2 then set the maximum cost authorized for your calls.

- **Price Per Unit**: input PIN2 then set the price per unit that is applied when the cost of your calls is calculated.

Attention: Please contact your network provider for PIN2 code. Note that this is not intended to be used for billing purposes.

- **SIM1 SMS counter**
  - **Sent**: count the messages those have been sent. You can press **Reset** to empty it.
  - **Received**: count the messages those have been received. You can press **Reset** to empty it.
- **SIM1 GPRS counter**
  - **Last sent**: record the bites of last uploading.
  - **Last received**: record the bites of last downloading.
  - **All sent**: record the total amount of bites has been uploaded.
  - **All received**: record the total amount of bites has been downloaded.
  - **Reset counter**: reset the counter.

5.4.1.2 SIM2 call history

The operations are same with SIM1 call history.

5.4.2 General call settings

5.4.2.1 SIM1 call settings

***Attention*:** Use this menu to access network services. Please contact your service provider to check their availability and subscribe to them, if you wish.

- **Caller ID**: this network service allows you to prevent your phone number from being displayed on the phone of the person being called.
  - **Set by Network**: use default setting.
  - **Hide ID:** hind own number while calling (with service provider's support).
  - **Send ID**: show own number while calling.
- **Call Waiting**: this network service informs you when someone is trying to reach you while you are on another call. Select the activate or deactivate the function. Select Query status to show the current status.

- **Call Divert**: this network service reroutes incoming calls to a phone number that you specify.
  - **Divert All Voice Calls**: divert all voice calls.
  - **Divert If Unreachable**: divert calls when you are not in an area covered by your service provider or when your phone is switched off.
  - **Divert If No Answer**: diver calls when you do not answer the phone.
  - **Divert If Busy**: diver calls when you are on another call.
  - **Divert All Data Calls**: divert all data calls.
  - **Cancel All Divert**: cancel all call diverting options.
- **Call Barring**: this network service allows you to restrict your calls.
  - **Outgoing Calls**
    - **All Calls**: prohibit all outgoing calls.
    - **International Calls**: prohibit international calls.
    - **International Except Home**: only allow calls to numbers within the current country when you are abroad, and to your home country.
  - **Incoming Calls**
    - **All Calls**: prohibit all incoming calls.
    - **When Roaming**: prohibit incoming calls when you use your phone outside of your home country.
  - **Cancel All**: cancel all call barring settings, allowing to be sent and received normally.
  - **Change barring PW**: change the call barring password obtained from your service provider.
- **Line Switching**: switch between line 1 and line 2.
- **Closed User Group**: switch off the User group function.

5.4.2.2 SIM2 call settings

The same operations with SIM1 call settings.

5.4.2.3 Black List

- **Mode**: press **Left soft key** to turn on or off the function. If turn on the function, the phone will reject the numbers in blacklist.
- **Blacklist numbers**: set the black list number and press OK to

save. You can set 5 black list numbers at most.

5.4.2.4 Auto Redial

When the function is set as on, the failed call will be auto redialed.

5.4.2.5 Speed Dial

Touch the icon ”Speed Dial” in idle mode to this menu directly.

You can set at most eight commonly used numbers as speed dial numbers. Press **Options** to access the following options:

- **Enable Speed Dial**: turn on or off the function.
- **Set Number**: set the numeric keyboard 2-9 correspond to a number. Hold the key to dial the number in idle mode.

5.4.2.6 Magic Sound Call

This function can change your tone during a call. It can make your voice sounds like others.

- **Magic Sound Status**: turn on or off the function.
- **Effect Type**: choose a type which your hope sounds like, include child, young lady, mature women, women, man, mature man, depressed and raucity.

5.4.2.7 More

- **Caller Time Display**: set whether to have call time display.
- **Call Time Reminder**: set whether to have minute reminder at end of each minute during calling.
- **Auto Quick End**: set whether to open or close the function which can end the call automatically.

5.5 Settings

Touch the icon ”Setting” in idle mode to this menu. This menu includes many personal setting to the phone.

5.5.1 Dual SIM settings

Touch the icon ”Mode” in idle mode to this menu directly.

The phone provide 4 modes, you can choose one mode according to the SIM card you have. The modes include:

Dual SIM open **Flight mode**

Only SIM1 open **Only SIM2 open**

5.5.2 Pen calibration

Use this function to calibration touch screen.

5.5.3 Phone Setup

- **Time and Date**: set the date and time in mobile phone.

  Touch the icon ”Time and Date” in idle mode to this menu directly.

  - **Set Home City**: select a city for the time setting.
  - **Set Time/Date**: set current time and date.
  - **Set Format**: select a format to show the time, 12 hours or 24 hours.
- **Schedule Power On/Off**: set the time that the mobile phone will be switch on/off automatically.

  Touch the icon ”Sched. Power On/Off” in idle mode to this menu directly.
- **Language**: select a language for the display text.
- **Preferred Input Methods**: select a default input method.
- **Greeting Text**: use this menu to enter the greeting that is displayed briefly when the phone is switched on.
- **Dedicated key**: use the Navigation keys as shortcut keys to access specific menus directly from Idle mode. Use this menu to assign a shortcut to a key.
- **Auto update of date and time**: select switch on/off the auto update function.
- **Handwriting**: set handwriting speed and pen color.
- **UART setup**: choose SIM1 or SIM2.
- **Smart Dialing**: select switch on/off the smart dialing function. If the function is set as on, the phone will search for all the match

numbers in the phone book automatically with the input number and show as a list in idle mode. You can choose one number to dial.

5.5.4 Network Setup

This menu includes **SIM1 network setup** and **SIM2 network setup**. All the operations are same.

- **Network Selection**
  - **New Search**: register the network.
  - **Select Network**: select a network from the network list and register.
  - **Selection Mode**: press **Change** to switch the search mode.
    - **Automatic**: auto search the network which the SIM card belongs to.
    - **Manual**: manual search all current available network and do manual registration.
- **Preferred Networks**: pre save the preferred networks.

5.5.5 Security Setup

Touch the icon ”Security” in idle mode to this menu directly.

5.5.5.1 SIM1 security setup

- **SIM1 Lock**: Choose security setting under this Menu to avoid unauthorized usage of mobile phone or SIM Card.

The 4-to 8-digit PIN (Personal Identification Number) protects your SIM card against unauthorized use. When this feature is enabled, the phone requires your PIN each time it is switched on.

Attention: If you enter an incorrect PIN/PIN2 three times in succession, the SIM card is blocked. To unblock it, you need to enter your PUK/PUK2 (Personal Unblocking Key). The codes are supplied by your network operator.

- **Fixed Dial**: If supported by your SIM card, Fixed Dial mode restricts your outgoing calls to a limited set of phone numbers. When this feature is enabled, you can make calls only to phone numbers stored in **Fixed Dial List**.

- **Mode**: enable or disable the feature. (PIN2 code is needed).
- **Fixed Dial List**: sett the fixed dial numbers.

Attention: you need PIN2 code to enable or disable the feature. The PIN2 code is supplied by your network operator.

- **Barred Dial**: If supported by your SIM card, Barred Dial mode forbids some numbers to dial.
- **Change Password**: change the PIN/PIN2 code.

5.5.5.2 SIM2 security setup

The same operations with SIM1 security setup but not include **Barred Dial**.

5.5.5.3 Phone Lock

The Phone Lock feature locks the phone from unauthorized use. When this feature is enabled, you must enter a 4 to 8 digit phone password each time the phone is switched on. The password is preset to "0000". To change the password, use the **Change Password** menu.

5.5.5.4 Auto Keypad Lock

Turn on or off the function of locking the keypad automatically. You can set the waiting time to turn on the function.

- **Lock**
  - The keypad will be locked automatically after the waiting time.
  - Press **End key** in idle mode to lock the keyboard.
- **Unlock**
  - Hold with finger or touch-pen and slide from left to right to unlock.

5.5.5.5 Change Password

Change the phone lock password.

5.5.5.6 Data Lock

If open the function, you should input password when access for private information. Private information includes SMS, phonebook, call history, MMS, and file manager. You need input the phone password to use it. The default phone password is "0000".

5.5.5.7 RemoteCtrl

If your phone lost, you can send fixed format messages to control the

phone.

- **Items**: Then go to the menu of Items to set the operations. Such as **PowerOff, Repeat Power Off, Delete Phonebook, Delete Callhistory, Delete Messages, Format Storage, Retrieve phonebook**. Touch an item and then touch **On** to selected, touch **Done** to save settings.
- **Change Control Password**: before using this function, you should set the control password first. The control password must be digit which is 4 characters (Ex: 1234).

Attention: to use this function, please turn on **Mobile Tracker** first. See **chapter 5.5.5.8**.

The functions and command as follows:

Functions	Commands (The contents that are send to the controlled phone)
Shut down the phone immediately	RMCTRL88 + control password(Ex:1234) + **poweroff**
Each time the system waits for 3 minutes will automatically shutdown.	RMCTRL88 + control password(Ex:1234) + **repeat poweroff**
Delete phone book (include phone and SIM card)	RMCTRL88 + control password (Ex:1234) + **delete phonebook**
Delete all call logs	RMCTRL88 + control password(Ex:1234) + **delete callhistory**
Delete all messages	RMCTRL88 + control password (Ex:1234) + **delete messages**
Format disk (include phone and memory card)	RMCTRL88 + control password(Ex:1234) + **format storage**
Retrieve the phone book by SMS	RMCTRL88 + control password (Ex:1234) + **retrieve phonebook**

Example

If you want to shut down the phone, you should send message like this: "**RMCTRL881234power off**" to control lost phone.

Attention

- There is no space between RMCTRL88 and control password.
- The character “RMCTRL” must be capitalization.
- Do not input space with smart English input method if you use other phone. to edit the remote control command. Please use common English input method to edit the remote control command.

5.5.5.8 Mobile Tracker

- **Status**: turn on or off the function. Before use the function, you should set a recipient number. When opened this function, the phone will band to the current SIM card. Once changed the SIM card, it will send messages to recipient when the phone power on.
- **Recipient number**: set the recipient number. (Ex: 1111)
- **Set Tracker Prompt**: set the prompts which will send to recipient. (Ex: Pay attention! This number is using your Lemon It-515 mobile phone)

Example

If the phone has changed with other SIM card (Ex: 2222) and power on, the phone will send a message of “Pay attention! This number is using your Lemon It-515 mobile phone” from 2222 to 1111. Then you can reply it with command by SMS to control it. See **chapter 5.5.5.7**.

Attention: some functions need support from network service provider.

5.5.6 Restore Factory Settings

Use this menu to reset all settings in your phone to default setup. The password is preset to 0000. You can change this password.

5.5.7 Sound Effect

Set the equalizer and audio effects.

5.5.8 Display Setup

- **Display Characteristic**

  Touch the icon ”Display” in idle mode to this menu directly.

  - **Wallpaper**: select the wallpaper for idle mode.
  - **Screen saver**: select a screen schaver for idle mode and the default time setting.

- **Power On Display**: select 3D to display at switch on. It could be default setting or downloaded.
- **Power Off Display**: select 3D to display at switch off. It could be default setting or downloaded.
- **Show Date and Time**: select switch on/off the display of time and date in idle mode.
- **Show Owner Number**: select whether to display own number in idle mode.
- **Clock Type**: select the clock style is analog or digital.
- **LCD Backlight**: set the LCD backlight and time.
- **Themes**: Show the theme list. Select a theme then press **Options** to the following functions:
  - **Activate:** Activate the theme.
  - **Update Period:** Set the update frequency.
  - **Set Order:** Set the change order.

5.5.9 Style setting

Set the effect while changing the interface.

5.5.10 Shortcuts

Touch the icon "Shortcuts" in idle mode to this menu directly.

Use this menu to set some usually functions. The phone can set 11 shortcuts at most. Press **Options** to access the following options:

- **Add**: add a new shortcut. Select a function from the list and press **Left soft key** or **OK key**. Then set the order to display.
- **Edit**: replace the current shortcut by selected shortcut.
- **Delete**: delete the current shortcut.
- **Delete All**: delete all shortcuts.
- **Enable/Disable**: enable or disable the current shortcut. It is unavailable in the shortcut list while disable.
- **Change Order**: change the order of the current shortcut.

How to use:

1. Press **Left soft key** in idle mode and select **Settings** -> **Phone Setup** -> **Dedicated key**. For example, select **Up** and press **Edit**,

then select **Shortcuts** form the list and press **Ok** to save the settings.

2. Press the **Up key** in idle mode will show the shortcut list, select one function to use it.

5.6 Multimedia

Touch the icon ”M-media” in idle mode to this menu.

5.6.1 Camera

Touch the icon ”Camera” or press **Camera key** in idle mode to this menu directly.

Press **Options** to access the following options:

- **Album**: go to the album.
- **Camera Setting**: set related parameters for photo taking.
- **Image Setting**: set photo’s size and quality.
- **White Balance**: choose a light mode for photo taking.
- **Scene Mode**: according to the environment to choose a mode
- **Effect Setting**: choose screen style.
- **Add Frame**: choose frame (only for the picture size of 240*320).
- **Storage**: select saving pass to phone or memory card.
- **Flash Light**: turn on or off the flight light.
- **Restore Default**: restore default setting.

Operation:

- Press **Camera key** or **OK key** to take a photo.
- Press **Left/Right key** to adjust EV.
- Press **Volume keys** to change the frame (only for the picture size of 240*320).
- Touch the icons on the screen to carry on the operation.

5.6.2 Image Viewer

Touch the icon ”Album” in idle mode to this menu directly.

Press **Options** to access the following options:

- **View**: display the image.
- **Browse Style**: change the view mode on the file list.
- **Forward**: set the image as wallpaper, power on/off display or caller ID image for a phonebook entry. Send the image via MMS or Bluetooth.
- **Rename**: change the file name.
- **Delete**: delete the selected files.
- **Delete All Files**: delete all files.
- **Sort**: change the sort order of files.
- **Storage**: select the pass to store or to read, either from phone or from memory card.

Shortcut key operation:

- Press **Left/Right key** or **Volume keys** to change the picture.
- Touch the icons on the screen to carry on the operation.

5.6.3 Video Recorder

Touch the icon ”VideoRec” in idle mode to this menu directly.

Press **Options** to access the following options:

- **Camcorder Setting**: set related parameters for camcorder.
- **Video Setting**: set video parameters.
- **Effect Setting**: set video effects.
- **Storage**: select saving pass to phone or memory card.
- **Restore Default**: restore default setting.

Operation:

- Press **OK key** or **Camera Key** to Start/Pause record.
- Press **Up/Down key** or **Volume keys** to adjust the focal distance.
- Press **Left/Right key** to adjust EV.
- Touch the icons on the screen to carry on the operation.

5.6.4 Video Player

Touch the icon ”Video” in idle mode to this menu directly.

Select the file to be played in folder and press **Options** to access the

following options:

- **Play**: go into play screen
- **Forward**: set the video as caller ID video for a phonebook entry or send via MMS or Bluetooth.
- **Rename**: rename the files.
- **Delete**: delete the selected files.
- **Delete All Files**: delete all saved files.
- **Sort**: set the logic for sorting.
- **Storage**: select the pass to store or to read, either from phone or from memory card.

Operation:

- Press **OK key** to Start/Pause playing.
- Press **Left/Right key** to forward or back playing.
- Press **Volume keys** to adjust volume.
- Touch the icons on the screen to carry on the operation.

5.6.5 Photo editor

- **Photo Artist**: resize or clip the picture. You can select the picture form file or capture form camera.
- **Image Tiles**: select 2, 4, or 9 images to join them to one picture.

5.6.6 Audio Player

Touch the icon ”MP3” in idle mode to this menu directly.

Use this menu to enjoy music. First, you need to save MP3 files in your phone’s memory or memory cart.

Select a song and press **Options** to access the following options:

- **Play**: play the song.
- **Detail**: see detail information of the song.
- **Add To Rings**: add the song into ringtone.
- **Add**: add a new song to the list. This menu is unavailable if the **List Auto Gen** is turned on.
- **Remove**: remove the song form the list. This menu is unavailable if the **List Auto Gen** is turned on.
- **Remove All**: remove all the songs from the list. This menu is

unavailable if the **List Auto Gen** is turned on.

- **Refresh List**: refresh the list. This menu is unavailable if the **List Auto Gen** is turned off.
- **Settings**: set the default settings for play music files.
  - **Play List**: memory status for phone or memory card.
  - **List Auto Gen**: generation music list automatically or not.
  - **Repeat**: select a repeat mode.
  - **Shuffle**: turn shuffle mode on or off.
  - **Background Play**: select to play music even after exit this menu.
  - **BT Stereo Output**: select to play music Bluetooth stereo output.
  - **BT Stereo Headset**: select to use BTstereo headset.
  - **Sound Effect**: select to play music model.
  - **Lyrics Display**: select to play music Lyrics display On/Off.

Operation:

- Press **Up key** to Play/Pause the song.
- Press **Down key** to stop the song.
- Press **Left/Right key** to change songs.
- Press **Volume keys** to adjust volume.
- Touch the icons on the screen to carry on the operation.

5.6.7 Sound Recorder

Touch the icon ”Recorder” in idle mode to this menu directly.

Select to record sound.

Press **Options** to access the following options:

- **Record**: record a new voice memo.
- **Play**: play the voice memo.
- **Append**: add new extended part to the selected file. (only for amr and awb file)
- **Rename**: change the name of voice memo.
- **Delete**: delete the voice memo.
- **Delete All**: delete all voice memos.

- **Settings**: set the parameters for sound record.
- **Forward**: set the memo as ringtone to profile or send it via MMS or Bluetooth.

5.6.8 FM Radio

Touch the icon ”FM” in idle mode to this menu directly.

Press **Options** to access the following options:

- **Channel list**: show the channel list. You can choose a channel and play or delete it. You can also change the name of the channel. At most 9 channels.
- **Manual Input**: input one channel manual and play it.
- **Preset auto search**: search the channel automatically and save to the channel list.
- **Settings**: set the background play.
- **Record**: record the program while playing.
- **Append**: select an audio file to add new extended part to the selected file.
- **File List**: view the audio files in memory card.

Shortcut key operation:

- Press **OK key** to Start/Pause record.
- Press **Up key** to On/Off search function. If enable the function, the phone will search the channel automatically when press **Left/Right key**.
- Press **Down key** to Play/Stop the program.
- Press **Left/Right key** to change channel.
- Press **Volume keys** to adjust volume.
- Touch the icons on the screen to carry on the operation.

5.6.9 Schedule FM record

You can record the FM radio programs at schedule time. The phone can set 4 schedule time at most.

5.6.10 Slide show

Select a fold and use slides to show the pictures or video files.

5.7 File Manager

Touch the icon ”Files” in idle mode to this menu.

Manage the files saved in phone and memory card. Press **Up/Down key** to select then press **Left soft key** to option menu:

- **Open**: open the folder.
- **Create Folder**: create a new folder in it.
- **Format**: format the folder.
- **Rename**: rename the folder.
- **Delete**: delete the folder and files in it.
- **Sort by**: change the sort order of folders.

Attention: The options will be different in some kind of folder.

5.8 Fun

Touch the icon ”Fun” in idle mode to this menu.

Attention: some application and service are charged, the detailed information please consult the network operator.

5.8.1 Java Box

Touch the icon ”Java” in idle mode to this menu directly.

The phone has pre-installed some java applications such as facebook, ebuddy and opera mini.

5.8.2 Multimedia Space

The phone has pre-install some games and applications. Some games need insert memory card or connect GPRS to play.

5.8.3 MSN

Touch the icon ”MSN” in idle mode to this menu directly.

The phone has pre-setup the software of MSN. You should select SIM card and net in the menu of setting before using. Then select start to

use it. Please insert the memory card before using.

5.8.4 Games

The mobile phone has pre-install Mahjong and Puzzle. You can set some functions before starting the game. The **Games settings** includes **BGM, Sound Effect,** and **Vibration**.

5.8.5 Yahoo!

You can use the yahoo services such as Y! Homepage, Y! Mail, Y! Messenger, Y! Cricket, Y! Astrology, Y! News, Y! Finance, Y! Search and Y! Movies.

Touch the icon ”Yahoo” in idle mode to visit Y! Homepage directly.

5.9 User Profiles

Touch the icon ”Profile” in idle mode to this menu.

User can select different mode, and can define your own modes. This set of mobile provides many modes.

- **General**
  - **Activate**: active General mode.
  - **Customize**: set the General mode.
    - **Tone Setup**: set tone for incoming call, alarm, Power on, Power off, message tone and keypad tone.
    - **Volume**: adjust the volume for ring tone and key pad
    - **Alert Type**: select alert type. There are ring, vibration only, vibration and ring, vibration then ring.
    - **Ring Type**: select to single, repeat or ascending
    - **Extra Tone**: set reminding sound for special case: warning, error, camp on or connect.
    - **Answer Mode**: turn on or off the feature of answering by any key.

- **Meeting**: operating as General Mode.
- **Outdoor**: operating as General Mode.
- **Indoor**: operating as General Mode.
- **Headset**: plug in headset to active this mode. Personal setting is as General Mode.
- **Bluetooth**: when connected to the Bluetooth, the mode opens automatically. Personal setting is as General Mode.

5.10 Organizer

Touch the icon “Organizer” in idle mode to this menu.

5.10.1 Calendar

Touch the icon ”Calendar” in idle mode to this menu directly.

The Calendar feature enables you to keep track of your schedule and tasks.

When you access the **Calendar** menu, the calendar in Month view appears with today’s date indicated highlight.

Selecting a day

- Press **Left /Right key** to move by day.
- Press **Up/Down key** to move by week.
- Press **Volume keys** to move by month.
- You can also touch the corresponding icons to select date.

Using calendar options

Press **Options** to access the following options:

- **View Tasks**: view all tasks.
- **Add Task**: add a new task. Select task type first, then enter information or change the settings.
- **Jump To Date**: you can view tasks for the selected date.
- **Go To Weekly/Monthly View**: change the view mode of the calendar.

5.10.2 To Do List

Touch the icon ”To do” in idle mode to this menu directly.

Support many to do list items. You can **View**, **Add**, **Edit**, **Delete**, **Delete All**, **Send vCalendar** on a selected item.

5.10.3 Alarm

Touch the icon ”Alarm” in idle mode to this menu directly.

Use this menu to set alarms to sound at a specific time. A wake-up alarm is not affected by your sound setting.

Five alarm clocks can be set: select an alarm clock to edit and set.

5.10.4 World Clock

Touch the icon ”Time zone” in idle mode to this menu directly.

Use this menu to find out what time it is in another part of the world.

From the world map, press **Up/Down key** to switch between the city and time zone, and then press **Left/Right key** to change. As the time line moves, the time and date of the given zone display.

From the world map, press **Options** and select **Daylight Saving Time for Foreign City**. Press **Left soft key** to turn on or off the feature.

5.11 Services

Touch the icon “Service” in idle mode to this menu.

5.11.1 STK

This menu is available if you use a SIM card that provides additional services, such as news, weather, sports, entertainment, and location services. Available services may vary, depending on your service provider’s plans. For details, see your SIM card instructions or contact your service provider.

5.11.2 WAP

Touch the icon ”Browser” in idle mode to this menu directly.

The Wireless Application Protocol (WAP) on your phone allows you to access the wireless web. From the wireless web, you can access updated information and a wide variety of media content, such as wallpapers, ringtones, and music files.

Attention: GPRS service need network support. Only available when the mobile is switch on and stays within GPRS network coverage.

- **Homepage**: connect your phone to the network and load the homepage of the wireless web service provider.
- **Bookmark**: save URL addresses to quickly access a website.
- **Recent Pages**: show all history record that you have visited.
- **Offline Pages**: show all the webs saved.
- **Enter Address**: enter a URL address manually.
- **Service Inbox**: where to save news sent by service provider
- **Settings**: set internet surf
  - **Select SIM**: select SIM1 or SIM2 network to connect internet.
  - **Profile**: create or select an account of SIM1 or SIM2.
  - **Browser options**: set timeout and if show the images while browsing.
  - **Service massage setting**: set enable push, trust settings, SL settings and trust list.
  - **Clear Cache**: clear cache.
  - **Clear Cookies**: clear cookies.
  - **Trusted Certificates**: view trusted certificates.

5.11.3 Data account

- **GSM Data**: select an account to go in
  - **Account Name**: edit account name.
  - **Number**: enter the PPP server phone number.
  - **Username**: enter the login ID.
  - **Password**: enter the login password.
  - **Line Type**: select analogue or ISDN.
  - **Speed**: select the speed for transmit.
  - **DNS**: enter the DNS address.
- **GPRS**: select an account to go in

- **Account Name**: select to edit account name
- **APN**: enter the access point name of the GPRS network gateway.
- **User Name**: enter the login ID.
- **Password**: enter the login password.
- **Auth. Type**: select authentication type.

5.12 Extra

Touch the icon ”Extra” in idle mode to this menu.

5.12.1 Calculator

Touch the icon ”Calculator” in idle mode to this menu directly.

Use this menu to perform basic arithmetic functions such as addition, subtraction, multiplication, and division.

1. Enter the first number.
   - Press Touch icons to input the number and decimal point.
   - Press **Right soft key** to clear off the input.
2. Touch screen icons to access the math function you want.
3. Enter the second number.
4. Touch **OK** to view the result.
5. If necessary, repeat from step 2 to continue the calculation.

Attention: the calculator’s precision is limited and may have deviation especially in dividing.

5.12.2 Unit Converter

Touch the icon ”Rate” in idle mode to this menu directly.

This phone set provides units converter function. It includes weight and length measurement

- **Weight**: weight measurement include: Kg to Lb and Kg to Oz. Input the figure into corresponding field, press **Left soft key** to convert, the result will show in the other edit field.

- **Length**: length measurement includes: Km to Mile, meter to yd, meter to foot and cm to inch. Input the figure into corresponding field, press **Left soft key** to convert, the result will show in the other edit field.

5.12.3 Currency Converter

Use this menu for currency conversions.

- Input the rate and then press **Left soft key** or **OK key**.
- Set the ratio then input the local currency.
- Press **Left soft key** or **OK key** to view the result.

5.12.4 Health

- **BMI**: select male/female, then input height and weight. Press **Left soft key** to show result. The result also can be presented as chart.
- **Menstrual**: After get in, please input last period date and regular period. Press **Left soft key** to confirm and show the result. The chart will show the menstrual time and period time. Select a date to know the possibility of pregnancy.

5.12.5 Stopwatch

Touch the icon ”Stopwatch” in idle mode to this menu directly.

Use this menu to measure elapsed time.

- **Typical Stopwatch**: two timing methods include **Split Timing** and **Lap Timing**. You can also save the record and view or delete it.
- **nWay Stopwatch**: touch one of the direction icon to select an interval and begin to record. You can repeat this step for a total of 4 intervals. Hold **Left soft key** or **OK key** to reset the timers.

5.12.6 E-Book Reader

Touch the icon ”E book” in idle mode to this menu directly.

Use this menu to read the E-Book file. The supported file formats are TXT and PDB. You can copy the file to the **Ebook** folder to read.

5.12.7 Bluetooth

Touch the icon ”Bluetooth” in idle mode to this menu directly.

Your phone is equipped with Bluetooth technology which enables you to connect the phone wirelessly to other Bluetooth devices and exchange data with them, talk hands-free, or control the phone remotely.

There are many Bluetooth devices around us, such as mobile phone, computer, and Bluetooth headset and so on. They are compliant with Bluetooth wireless technology:

- HSP (Bluetooth headset to make phone call), A2DP/GAVDP (Stereo music function): These two functions are used on Bluetooth headset. Please pay attention to the product instructions, as many Bluetooth headsets only supports one of these functions.
- FTP(Change data via Bluetooth wireless technology with other mobile phone)
- SPP(Change data via Bluetooth wireless technology with computer)
- DUN(Connecting to internet when connecting to computer)

Press **Options** to access the following options:

- **Power**: turn on or off Bluetooth.
- **Inquiry Audio Device**: search for Bluetooth audio headset, which is the opening Bluetooth headset. The devices include HSP and A2DP/GAVDP.

  Attention: Only Bluetooth headset can open on this menu, and other device should open from **My Device**.
- **Remote Control**: phone has connected with some BT device which can control the phone remotely.
- **My Device**: If you have connected with some Bluetooth devices, it will show the devices list. Otherwise, you can choose **Inquiry BT Device** to search other Bluetooth devices except Bluetooth headset. Select a device and press **Bond**. Enter a Bluetooth PIN or the other device’s Bluetooth PIN, if it has one, and press **OK**. When the owner of the other device enters the same code, the pairing is complete.

- **Connect**: connect to the device.
- **Rename**: rename the selected device.
- **Delete**: delete the selected device.
- **Delete All**: delete all devices from the list.
- **Service List**: access the Bluetooth service list of the device.

- **Active Device**: display the connecting devices list. You can choose one to disconnect.
- **Setting**: set the Bluetooth functions of this mobile phone.
  - **Visibility**: allow other Bluetooth devices to search for your phone.
  - **Change Device Name**: assign a Bluetooth device name to your phone, which is then displayed on other devices.
  - **Authentication**: determine if the phone asks for your confirmation when other devices access your data.
  - **Audio Path**: choose the sound source output when Bluetooth connected.
  - **FTP Setting**: set the share folder and access right.
- **About**: display the Bluetooth information.

5.13 Raiden

Touch the icon ”Raiden” in idle mode to this menu.

The mobile phone has pre-setup the game of Raiden. Please insert the memory card before playing.

5.14 Ice Fall

Touch the icon ”Ice Fall” in idle mode to this menu.

The mobile phone has pre-setup the game of Ice Fall. Please insert the memory card before playing.

5.15 Google

Touch the icon ”Google” in idle mode to visit

http://wap.google.com.

ZONE :			
STATE:	Uttar Pradesh		
			City
1)	ASC Name:	Ankur Care Centre	Agra
	Contact Person:	Mr. Ankur	
	Address:	28/2, Shop No.-B-111, Jyoti Building,, Opp Post Office, Near LG Service Centre, Sanjay Palce, Agra-282002	
	Ph No:	9412254152, 9319380777	
	E-mail:	ankur.agra@lemonmobiles.com	
2)	ASC Name:	Jain Sons	Agra
	Contact Person:	Mr. V.K. Jain	
	Address:	3-A, Raghu Shopping Complex, MG Road, Agra	
	Ph No:	056524000215, 05622853314	
	E-mail:	jain.agra@lemonmobiles.com	
3)	ASC Name:	Aadinath Telecom	Ajmer
	Contact Person:	Mr. Kamal Jain	
	Address:	Near Dr. Chandra Narayan, Ghee Mandi, Naya Bazar, Ajmer	
	Ph No:	9982951217	
	E-mail:	aadi.ajm@lemonmobiles.com	
4)	ASC Name:	Infocare	Aligarh.
	Contact Person:	Mr. Pranab Bansal	
	Address:	No. -13,14, Vikram Arcade, Railway Road, Aligarh.	

	Ph No:	935958880	
	E-mail:	Infocare.aligarth@lemonmobiles.com	
5)	ASC Name:	S.S.S. Telecom	Allahabad
	Contact Person:	Mr. Shailendra Tripathi	
	Address:	68 zero road (behind baxi colour lab)allahabad	
	Ph No:	05323255338, 09616171819	
	E-mail:	sss.all@lemonmobiles.com	
6)	ASC Name:	B.R.B.M. Teleservices	Allahabad
	Contact Person:	Mr. Girish Kumar Agrawal	
	Address:	30,V.N.Marg (City Hotel Building) Allahabad-211003	
	Ph No:	0532-2401511, 9335062777	
	E-mail:	brbm.allahabad@lemonmobiles.com	
7)	ASC Name:	Khatu Shyam and Company	Bahraich
	Address:	Laxmi Plaza, Near Chawani Chauraha, Opp. Allahabad Bank ATM	
		Bahraich	
	Ph No:	9984184166	
	E-mail:	khatu.bahraich@lemonmobiles.com	
8)	ASC Name:	Mahadev Communication	Badaun
	Contact Person:	Mr. Rajesh	
	Address:	krishna Puri, Railway Crossing, Civil Lines	
		Badaun	
	Ph No:	9808291322, 9758732603	
	E-mail:	mahadev@lemonmobiles.com	

9	ASC Name:	Customer Care Point	Badaun
	Contact Person:	Customer Care Point	
	Address:	1st Floor, Plaza Market, Near Ghanta Ghar	
	Ph No:	9719418537	
	E-mail:	customer.badaun@lemonmobiles.com	
10	ASC Name:	Kissan Communication	Baghpat
	Contact Person:	Mr. Vivek Arya	
	Address:	Opp.Gali No.-2, Court Road	
		Baghpat (U.P.)-250609	
	Ph No:	9359366111	
	E-mail:	khatu.bahraich@lemonmobiles.com	
11	ASC Name:	Muneer Telecom	Bareilly
	Contact Person:	Mr. Farhat Ali Khan	
	Address:	Shop No.13, Novelty Plaza ,Near Roadways Stand	
	Ph No:	5812570160, 9259580800	
	E-mail:	muneer.bareilly@lemonmobiles.com	
12	ASC Name:	Shree Balaji Communication	Bulandshahr
	Contact Person:	Mr. Mayur	
	Address:	First Floor,Sharad Gyaan Complex ,Opp.Dr.S.C.Gupta Compound	
	Ph No:	9219656300 ,9259006500	
	E-mail:	shree.bulandshahr@lemonmobiles.com	
13	ASC Name:	Bansal Mobile Sansar	Chitrakoot

			karwi
	Contact Person:	Sandeep Bansal	
	Address:	Kali Devi Chauraha, Purani Bazar Karwi	
	Ph No:	9335869000	
	E-mail:	bansalmobile.chitrakoot@lemonmobiles.com	
14	ASC Name:	Shree Shyam Mobile Collection	Deoria
	Contact Person:	Jitesh kumar	
	Address:	Amar Jyoti Road,Deoria	
	Ph No:	09838450681, 9936904247	
	E-mail:	shyam.deoria@lemonmobiles.com	
15	ASC Name:	Triveni Computer Service	Etah
	Contact Person:	Vinod Kunar	
	Address:	688/01 Vijay Nagar,In Front of Sarda Cinema,Thundi Sarak.	
	Ph No:	9368111681, 05742-235592	
	E-mail:	triveni.etah@lemonmobiles.com	
16	ASC Name:	Front Line Computers	Etawah
	Contact Person:	Mr. Puneet Kaushik\Mr.R.R.Tiwari	
	Address:	132, Civil Lines, Pakka Talab Chauraha, Pin-206001	
	Ph No:	9219404194	
	E-mail:	front.etawah@lemonmobiles.com	
17	ASC Name:	Care Electronics	Faizabad
	Contact Person:	Mr. Naval K. Gupta	
	Address:	Shop No. 3, Build. No. 5/11/114, Hamdani Kothi,	
		Pargana Havely, Reed Ganj.	
	Ph No:	9696985977, 9415955554	

	E-mail:	care.faizabad@lemonmobiles.com	
18	ASC Name:	Gupta National Radios	Farrukhabad
	Contact Person:	Basant Kr.Gupta	
	Address:	2/74, Ghumna Bazar, Farrukhabad	
	Ph No:	9838648303	
19	ASC Name:	Gauri Infocare	Firozabad
	Contact Person:	Mr. Vinod kumar,Rajkumar	
	Address:	20,Ratan vihar complex, suhag nagar	
	Ph No:	9319755155	
	E-mail:	gauri.firozabad@lemonmobiles.com	
20	ASC Name:	V.M. Computer Services	Ghaziabad
	Contact Person:	Akash Singh	
	Address:	C/O Money Comunication ,Shop No.1, C-22, RDC, GHAZIABAD(U.P.)	
	Ph No:	1204568495	
	E-mail:	vm.ghaziabad@lemonmobiles.com	
21	ASC Name:	Aarna Infotech	Gonda
	Contact Person:	Mr. Tarang Premi	
	Address:	Suraj Complex Malviya Nagar	
	Ph No:	9161423675	
	E-mail:	aarnainfotech.gonda@lemonmobiles.com	
22	ASC Name:	Shivam Infotech World	Gorakhpur
	Contact Person:	Mr. Vishal Pandey	
	Address:	PT.Harihar PD. Dubay Marg Betiahata, Gorakhpur	
	Ph No:	9336415312	

	E-mail:	shiv.gar@lemonmobiles.com	
23	ASC Name:	M.M Communications	Gorakhpur
	Contact Person:	Ashwani Kumar	
	Address:	C/o ICON TS,4-Jai Joshi Complex, Medical College Road,	
		Basharatpur	
	Ph No:	9336422769	
	E-mail:	mm.gorakhpur@lemonmobiles.com	
24	ASC Name:	Kaushal Mobile Shop	Hamirpur
	Contact Person:	Anurag Tiwari	
	Address:	Paliwal Complex, King Road, Hamirpur	
	Ph No:	9838630043	
	E-mail:	kaushal.hamirpur@lemonmobiles.com	
25	ASC Name:	Shipra Electrical & Appliances	Hardoi
	Contact Person:	Mr. Gaurav Gupta	
	Address:	RD Plaza Shop No.6 Near Agrawal Dhramsala Circular Road	
	Ph No:	9838908332	
	E-mail:	shipra.hardoi@lemonmobiles.com	
26	ASC Name:	Krishna Communication	Hapur
	Contact Person:	Mr. Praveen Goyal	
	Address:	Shankar Ganj, Garh Road.	
	Ph No:	9219121221	
	E-mail:	krishna.hapur@lemonmobiles.com	
27	ASC Name:	Arya Electricals	Hathras
	Contact Person:	Vikas Sharma	
	Address:	Lakshmi Talkies Market ,Kamla	

		Bazar ,Hathras	
	Ph No:	05722230660 ,09219428655	
	E-mail:	arya.hathras@lemonmobiles.com	
28	ASC Name:	Sapna Auto Agency	Jaunpur
	Contact Person:	Mr. Dileep Kumar Singh	
	Address:	Wazidpur Tiraha, Jaunpur	
	Ph No:	9336523000	
	E-mail:	sapna.jaunpur@lemonmobiles.com	
29	ASC Name:	Plus Computer Repairing Centre	Jhansi
	Contact Person:	Sujit Kumar	
	Address:	Shop No.-5, Basement, Modi Tower, Jeevan Shah	
	Ph No:	9453941965	
30	ASC Name:	K Mobile	Kanpur
	Contact Person:	Mr. Sanjeev Singh	
	Address:	FFD-12 3rd Floor, Somdutt Plaza, Kanpur	
	Ph No:	3838828282, 9670037632	
	E-mail:	k.kan@lemonmobiles.com	
31	ASC Name:	Wave Technologies	Kanpur
	Contact Person:	Mr. Prabhat Singh	
	Address:	25/20 Canal Road Ground Floor	
	Ph No:	9621212425, 9792411113	
	E-mail:	wave.kanpur@lemonmobiles.com	
32	ASC Name:	Carewell IT Services Pvt. Ltd	Kanpur
	Contact Person:	Mr.Amit Asthana	
	Address:	Govind Nagar, Opp. Natraj Cinema	
	Ph No:	9919336166	

33	ASC Name:	J.P Enterprises	Khatima
	Contact Person:	Mr. J.P. Singh	
	Address:	Opp.Rana Pratap School, Melaghat Road, Khatima, U.K.	
	Ph No:	09759130530, 09837947428 ,05943251781	
	E-mail:	jp.kha@lemonmobiles.com	
34	ASC Name:	Info Vein Software Pvt. Ltd.	Lucknow
	Contact Person:	Mr. Kautilya Sahu	
	Address:	1st Floor , Faridi Building, Maqbara Road,	
		Hazratganj, Lukhnow - 226001	
	Ph No:	9335229513	
	E-mail:	info.luc@lemonmobiles.com	
35	ASC Name:	G L Services	Lucknow
	Contact Person:	Mr.Sanjeev Batra	
	Address:	Sri Niwas, IInd Floor, 14, Beni Prasad Road, Lalbagh	
	Ph No:	9839411655	
36	ASC Name:	S.S. Computers	Mainpuri
	Contact Person:	Ankit Mishra	
	Address:	Near Raj Marriage Home, Haridarshan Nagar	
	Ph No:	9259518106	
	E-mail:	ss.mainpuri@lemonmobiles.com	
37	ASC Name:	Chotu Mobile Center	Maudaha
	Contact Person:	Mr. Radha Krishna Gupta	
	Address:	Rashmi Petrol Pump, Maudaha,	
	Ph No:	9616096160	
	E-mail:	chotu.hamir@lemonmobiles.com	

38	ASC Name:	India Electronics	Meerut
	Contact Person:	Mr. Saeed khan	
	Address:	A 77 Bank Street opp. Scout guide school Lalkurti Meerut	
	Ph No:	9997692165	
	E-mail:	india.mee@lemonmobiles.com	
39	ASC Name:	Swastik Telecom	Mirzapur
	Contact Person:	Mr. Shishir Agrawal	
	Address:	Imarti Road	
	Ph No:	9415232277	
	E-mail:	swastik.mirzapur@lemonmobiles.com	
40	ASC Name:	Aditya Infotech	Moradabad
	Contact Person:	Mr.Adatiya	
	Address:	1st Floor , Gyanmurti Complex ,Opp. Gandhi Ashram,	
		Tadi Khana, Court Road, Moradabad	
	Ph No:	9359848660	
	E-mail:	aditya.moradabad@lemonmobiles.com	
41	ASC Name:	Krishna Electronics & Telecom	Muzaffarnagar
	Contact Person:	Mr. Gurucharan Singh Arora	
	Address:	1 Agrawal Market,Muzaffarnagar-251002(UP)	
	Ph No:	9897950263	
	E-mail:	krishna.muz@lemonmobiles.com	
42	ASC Name:	R.K INFOTECH	

	Contact Person:	Mr. Alok Gupta	Mathura
	Address:	G-3 AATITHYA PALACE COMPLEX,	
		SONKH ADDA, JUNCTION ROAD	
	Ph No:	9319999666	
	E-mail:	rk.mathura@lemonmobiles.com	
43	ASC Name:	Ambe Electronics	NOIDA
	Contact Person:	Mr. Sonu	
	Address:	Ambe Electronics, J-34, Sector-18, Opposite Pizza Hut, Noida (U.P.)	
	Ph No:	9212135520 ; 0120-4233629	
	E-mail:	ambeelectronics@gmail.com	
44	ASC Name:	Karuna Enterprises	Raebareli
	Contact Person:	Vikas Jain	
	Address:	Shop No.-3, Bajpai Market, Malik Mau Road, Beli Ganj	
	Ph No:	9336098053	
45	ASC Name:	Sai Service Station	Salempur
	Contact Person:	Santosh Mobile	
	Address:	Station Road, Salempur	
	Ph No:	9936702500	
	E-mail:	sai.salempur@lemonmobiles.com	
46	ASC Name:	Hari Om Cellulars	Shamli
	Contact Person:	Mr. Vikrant Gupta	
	Address:	Bara Bazaar, Shamli, Distt. Muzaffarnagar - 247776	
	Ph No:	9758006791	
	E-mail:	hari.sh@lemonmobiles.com	
			Shamli
47	ASC Name:	Dev Telecom	

	Contact Person:	Yogesh,Manoj,amit	
	Address:	Dhimanpura,Near Muzaffarnagar	
		Bus Stand,Opp.Indian Overseas Bank	
	Ph No:	9219516400	
	E-mail:	dev.shamli@lemonmobiles.com	
48	ASC Name:	Money Communication (SharanPur)	saharanpur
	Contact Person:	Vikas	
	Address:	Shop No. 2, First Floor, Gole Market, Opp.	
		Income Tax Office, Court Road	
	Ph No:	9012997722	
	E-mail:	money.sharanpur@lemonmobiles.com	
49	ASC Name:	Websity Computers	Shajahanpur
	Contact Person:	C.M.Jauhari,Dharam Veer Singh	
	Address:	71, Tarin Bahadurganj, Near Clock Tower	
	Ph No:	9235428272	
	E-mail:	websity.shajahanpur@lemonmobiles.com	
50	ASC Name:	Shagun Mobile	
	Contact Person:	Santosh prajapati	
	Address:	shop no. 1 jama masjid alamnagar sitapur	
	Ph No:	9839943131	
	E-mail:	shagun.sitapur@lemonmobiles.com	
51	ASC Name:	Mobile Place	Sultan Pur
	Contact Person:	Mr. Pawan Pandey	

	Address:	Shop no.6, Super market Sultan pur-228001	
	Ph No:	9838624713	
	E-mail:	mobile.sult@lemonmobiles.com	
52	ASC Name:	Maa Duiza Telecom	Sonebhadra
	Address:	Aryan Samaj Chauraha	
53	ASC Name:	Avijit Infotech	Unnao
	Contact Person:	Mr.Vishnu Pandey	
	Address:	251 ,A.B. Nagar Opp.Collector ganj Unnao - 209801	
	Ph No:	9335353222	
	E-mail:	avijit.unnao@lemonmobiles.com	
54	ASC Name:	Vishal Communication	Varanasi
	Contact Person:	Mr. Vishal	
	Address:	S. 21/112,A-1 Englishiya Line, Varanasi(UP)	
	Ph No:	0542-6457159,09839259445, 09889510008	
	E-mail:	vishal.var@lemonmobiles.com	
55	ASC Name:	Maa Durga Electronics	Varanasi
	Contact Person:	Ms. Rekha Sirivastava	
	Address:	C26/1A, Ganesh Bagh, Kabir Road Near Petrol pump Varanasi	
	Ph No:	9336637297	
	E-mail:	maa.varanasi@lemonmobiles.com	
STATE:	Delhi		
56	ASC Name:	Mobile Planet	Delhi
	Contact Person:	Mr. Amarpreet Singh	

	Address:	19-20 2nd Floor Corner Market	
	Ph No:	9871517799, 0114052978	
	E-mail:	mobile.mal@lemonmobiles.com	
57	ASC Name:	Rajni communication	Rajokari
	Contact Person:	Mr. Rahul Yadav	
	Address:	in Front Of Maa Ganga Vidhyalaya ,	
		Near Main Bus Stand, Rajokari, New Delhi-38	
	Ph No:	09999550030 ,09999550020	
	E-mail:	rajni.raj@lemonmobiles.com	
58	ASC Name:	Classic Communications	Rohini
	Contact Person:	R. R. Garg	
	Address:	B-5/58 Sector 07, Rohini	
	Ph No:	09811208098, 011-42068284	
	E-mail:	classic.rohini@lemonmobiles.com	
STATE:	Haryana		
59	ASC Name:	Bee Ess Aar Communication	Ambala Cantt
	Contact Person:	Rajiv Gupta	
	Address:	27th First loor, M.C. Market, Behind Nigar Cinema	
	Ph No:	9416021234, 1714006229	
	E-mail:	beeess.ambala@lemonmobiles.com	
60	ASC Name:	Saini Mobile Repair	
	Contact Person:	Mr. Narender Saini	
	Address:	Kundan Cinema, Safidon Road	
	Ph No:	9812311911	
	E-mail:	saini.jind@lemonmobiles.com	

61	ASC Name:	Tara Tele& mobile	Karnal
	Contact Person:	Mr. Vivek Chaudhary	
	Address:	Shop no,-3&35Mela Ram School Market, Near Civil Hospital	
	Ph No:	0184-4037042,09896155005	
	E-mail:	tara.kar@lemonmobiles.com	
62	ASC Name:	Parasnath Telecom	Panipat
	Contact Person:	Mr Baldev Raj	
	Address:	Shop No. 17, Gupta Complex, Bishan Swaroop Colony, Nr Prem Hospital	
	Ph No:	9050903882	
	E-mail:	parasnath.panipat@lemonmobiles.com	
			Rohtak
63	ASC Name:	Shree Service Point	
	Contact Person:	Mr. Sandeep Deswal	
	Address	8, Naryan Complex, Civel Road	
	Ph No:	9215844846	
	E-mail:		
64	ASC Name:	Luxmi Telecom	Sonipat
	Contact Person:	Subhash Saini	
	Address:	Shop No.104,1st Floor, P.P.Tower,	
		Nr.Subash Chowk,Atlas Road,Sonipat	
	Ph No:	9253063350	
	E-mail:	luxmi.sonipat@lemonmobiles.com	
65	ASC Name:	Service Zone	Sirsa
	Contact Person:	Parveen Kumar	
	Address:	89, Bishna Market, Sirsa. (Haryana)	

	Ph No:		
	E-mail:	service.sirsa@lemonmobiles.com	
66	ASC Name:	Cell Point	Yamuna Nagar
	Contact Person:	Manoj kumar	
	Address:	Shop No. 9, Isher Complex, Yamuna Nagar	
	Ph No:	9813923239	
		cellpoint.yamunanagar@lemonmobiles.com	
STATE:	Jammu&Kashmir		
	ASC Name:	Khan Studio	Doda City
67	Contact Person:	Mr.Mansoor Khan	
	Address:	Old Bus Stand, Doda City, J&K-182202	
	Ph No:	01996-233278, 9906039303	
	E-mail:	khan.jk@lemonmobiles.com	
68	ASC Name:	Gips Computers	Jammu
	Contact Person:	House No. 74, Ambedkar Nagar ,	
		New High Court Road ,Old Janipur, Jammu.	
	Address:	Mr.Shabbir Hussain	
	Ph No:	9419175721	
	E-mail:	gips.jam@lemonmobiles.com	
69	ASC Name:	Gips Computers	Rajouri
	Contact Person:	Adishvar	
	Address:	Gips Computers ,Nr. Telephone Exchange Gate ,Gujjar Mandi	
	Ph No:	9419117861	

	E-mail:	gips.raj@lemonmobiles.com	
70	ASC Name:	Smart Care	Srinagar
	Contact Person:	Mr MANZOOR HAMID BHAT	
	Address:	OPP. HDFC BANK, KARAN NAGAR, SRINAGAR	
	Ph No:	9018111102	
	E-mail:	smartcare.jk@lemonmobiles.com	
71	ASC Name:	Sonu Square Communication	Udhampur
	Contact Person:	Mr.Devender Kumar Sharma	
	Address:	Ward No.11, Shiv Nagar Udhampur	
	Ph No:	09419216976, 0	
	E-mail:	sonu.udh@lemonmobiles.com	
STATE:	Himachal Pradesh		
72	ASC Name:	Ajay Refrigeration	Kangra
	Contact Person:	Mr. Ajay Puri	
	Address:	Near Petrol Pump, Opp UCO Bank Kangra(HP)-176001	
	Ph No:	09816455055, 09882265886	
	E-mail:	ajay.kan@lemonmobiles.com	
73	ASC Name:	Cell Point	Kullu
	Contact Person:	Sunil Khanna	
	Address:	Near Jawala Mata Mandir, Shamshi	
	Ph No:	9882266768	
	E-mail:	cell.kullu@lemonmobiles.com	
74	ASC Name:	Manoj Enterprices	Shimla
	Contact Person:	Sood JI	
	Address:	CABIN NO. 109, PC CHAMBER, OPP. JODHA NIWAS PARKING	

	Ph No:	2651464	
	E-mail:	manoj.shimla@lemonmobiles.com	
75	ASC Name:	Swastik Sales	Solan
	Contact Person:	Vikas	
	Address:	Thakur Building, Near CJM Resi., Anand Vihar, Sapoorn	
	Ph No:	9816494475	
	E-mail:	swastik.solan@lemonmobiles.com	
76	ASC Name:	Mobile Care	Sunder Nagar
	Contact Person:	Mr. Naveen Kumar	
	Address:	NH-21, Old Bus Stand, Sunder Nagar, Distt. Mandi	
	Ph No:	9816580674	
77	ASC Name:	Brahma Electronics	Una
	Contact Person:	Mr. Manoj	
	Address:	mc market una	
	Ph No:	9418049232	
	E-mail:	brahma.una@lemonmobiles.com	
STATE:	Punjab		
78	ASC Name:	GSM Services	Amritsar
	Contact Person:	Nitin	
	Address:	1-B, Liberty? Market,Opp. Railway Link Road.	
	Ph No:	2560540-5010201	
	E-mail:	gsm.amritsar@lemonmobiles.com	
79	ASC Name:	13 Balaji Computers	Batinda
	Contact Person:	Mr. Dinesh Kumar	

	Address:	d-10 b.k super market opposite	
		opposite santoshi mata mandir back side dhobi bazar	
	Ph No:	9464980013	
	E-mail:	balaji.bat@lemonmobiles.com	
80	ASC Name:	Alpha Infotech	Chandigarh
	Contact Person:	Mr. Yashpal Singh	
	Address:	No. 2068/1Burail, Sector-45A, Chandigarh	
	Ph No:	9888290217	
	E-mail:	alpha.chandi@lemonmobiles.com	
81	ASC Name:	Global Teletec	Chandigarh
	Contact Person:	T K Sharma	
	Address:	SCO 272, 2nd floor sector 32 D, Chandigarh	
	Ph No:	1725088604	
	E-mail:	global.chandigarh@lemonmobiles.com	
82	ASC Name:	Surya Enterprises	Dinanagar
	Contact Person:	raj kumar	
	Address:	Brahaman Sabha Mandir Road, Dinanagar	
	Ph No:	9876997954, 9888272832	
	E-mail:	surya.dinanagar@lemonmobiles.com	
84	ASC Name:	Shree Communication	Jalandhar
	Contact Person:	Mr. Batra	
	Address:	126, Ashok Nagar, Basti Sheikh Road	
	Ph No:	9855777775	

	E-mail:	shree.jaladhar@lemonmobiles.com	
85	ASC Name:	Arora Telecom	jalalabad west
	Contact Person:	Mr. Gurvinder Singh	
	Address:	Rani Mahal, Dr. Takkar Street, jalalabad(west)-152024	
	Ph No:	01638251002, 09876875395	
	E-mail:	arora.jal@lemonmobiles.com	
86	ASC Name:	Sai Ji Telecom	
	Contact Person:	kamal sony	
	Address:	shope no.4 pearl place ghumar mandi	
	Ph No:	1615020310	
	E-mail:	sai.ludhiana@lemonmobiles.com	
87	ASC Name:	Singla Communicators	Patiala
	Contact Person:	Shiv Singla	
	Address:	SCO 65, New Leela Bhawan, Pin-147001	
	Ph No:	1756531059	
	E-mail:	singla.patiala@lemonmobiles.com	
88	ASC Name:	Bharat Mobile Care	Rajpura
	Contact Person:	Mr. Bharat	
	Address:	No.72, Trunk Market Rajpura Twon(PB)-140401	
	Ph No:	01762-501053,09888491977	
	E-mail:	bharat.raj@lemonmobiles.com	
89	ASC Name:	L.S.Mobile Repair	Samana
	Contact Person:	Mr. Gurpreet Singh	
	Address:	Post Office Road Samana 147101	

	Ph No:	9888316926	
	E-mail:	lsmobile.samana@lemonmobiles.com	
STATE:	Rajasthan		
90	ASC Name:	Aadinath Telecom	Ajmer
	Contact Person:	Mr. Kamal Jain	
	Address:	Nr. Dr. Chandra Narayan, Ghee Mandi, Naya Bazar, Ajmer	
	Ph No:	9982951217	
	E-mail:	aadi.ajm@lemonmobiles.com	
91	ASC Name:	Pareek Electronincs	Alwar
	Contact Person:	Rukmani Saxena	
	Address:	Mehtab Singh Ka Nohrra, Near Kashi Ram circle, Alwar	
	Ph No:	9983739753	
	E-mail:	pareek.alwar@lemonmobiles.com	
92	ASC Name:	Shri Vinayak Associates	Bundi
	Address:	Shri Om Complex, New Dhanmandi Road	
93	ASC Name:	Shreenidhi Mobile	Baran
	Contact Person:	Gaurav	
	Address:	Dalla Ji Ki Dharam salla ke niche Hospital Road Baran	
	Ph No:	9929690003	
	E-mail:	shreenidhi.baran@lemonmobiles.com	
94	ASC Name:	Shree Keteshwer Telecom	Bikaner
	Contact Person:	Ashok Singh	

	Address:	Shop No 157 Ganpathi Plaza, K.E.M Road	
	Ph No:	9928480440	
	E-mail:	shree.bikaner@lemonmobiles.com	
95	ASC Name:	S.D. Mobile Center	Bharatpur
	Contact Person:	Jitendra Bansal	
	Address:	Shop No.-5, K.B. Plaza, Near Central Bank of India in	
		front of Laxman Mandir, Bharatpur (Rajasthan)-321001	
	Ph No:		
	E-mail:	sdmobile.bharatpur@lemonmobiles.com	
96	ASC Name:	Triputi Telecom	Dholpur
	Contact Person:	Mr. Mohsin Khan/Mr.Devendra Parmar	
	Address:	Shop No -12 Bhagwati Market Near Jagan Takies	
	Ph No:	9351623526	
	E-mail:	tirupati.dholpur@lemonmobiles.com	
97	ASC Name:	Akash Enterprises	Ganagpur
	Contact Person:	Mr Yogesh Agarwal	
	Address:	Opp. Panchayat Bhawan Dist. Sawai Madhupur	
	Ph No:	7463233222	
98	ASC Name:	Shree Shyam Communication World	Hanumangarh
	Contact Person:	Narander Wadhwa	
	Address:	opp lakhotia chakki durga mandir road hanumangarh	

	Ph No:	9649002000	
	E-mail:	shree.hanumangarh@lemonmobiles.com	
99	ASC Name:	Galaxmial Telecom	
	Contact Person:	Mr. Ramesh Verma	
	Address:	G-43 Ganpati Plaza, A Block, M I Road	
	Ph No:	1412389194	
	E-mail:	galaxmial.jaipur@lemonmobiles.com	
100	ASC Name:	Ram Sanehi Trading Co.	Jodhpur
	Contact Person:	Bhupendra bansal	
	Address:	Inside Narshingh Bhawan,Opp.Yash Yamaha Showroom	
		Behind Shiv mandir, Gol Building circle, Sardharpura,Jodhpur	
	Ph No:	9214897703	
	E-mail:	ram.jodhpur@lemonmobiles.com	
101	ASC Name:	Shri Nidhi Telecom	Jodhpur
	Contact Person:	Mr. Narsingh Bhawan	
	Address:	Behind Shiv Mandir Gol Building Circle, Sardarpura	
	Ph No:		
	E-mail:	shrinidhi.jodhpur@lemonmobiles.com	
102	ASC Name:	India Cell Service	Jhunjhunu
	Contact Person:	Mr. Mo. Yunush	
	Address:	Opp. Prabhat Cinema Station Road, Street Kabadi Market	
	Ph No:	9799083205	

	E-mail:	india.jhun@lemonmobiles.com	
103	ASC Name:	Gulati Communication	Kota
	Contact Person:	Mr. Saurabh	
	Address:	Shop-7,Plot No 1-D-1, Sheela Choudhary Road, SFS Colony,Talwandi	
	Ph No:	9829359620	
	E-mail:	gulati.kota@lemonmobiles.com	
104	ASC Name:	Padmawati Collection	Sikar
	Contact Person:	Mr. Pradeep Jain	
	Address:	5A, Kastoor Complex Tabela Road	
	Ph No:	1572513513	
	E-mail:	padmawati.sikar@lemonmobiles.com	
105	ASC Name:	Techno key	Udaipur
	Address:	15 B, Opp. Shri Ram Stone, N.R Police Line Tekri road	
	Ph No:	2942485642	
	E-mail:	techno.udaipur@lemonmobiles.com	
STATE:	Assam		
106	ASC Name:	Gem Palace Trading	Dibrugarh
	Contact Person:	Deepak Ranasaria	
	Address:	Keshan Market,Opp. Ranghar Cinema Hall,H. S. Road,Dibrugarh-1,(Assam)	
	Ph No:	9435330061	
	E-mail:	gem.dibrugarh@lemonmobiles.com	
STATE:	Jttaranchal		

107	ASC Name:	Bijnor	
	Contact Person:	Mr.Abdul Majid	
	Address:	G.K. Complex Near PNB Kotdawar Road Najibabad Dist> Bijnor-246763	
	Ph No:	01341-221086, 09897470680	
	E-mail:	majid.bij@lemonmobiles.com	
108	ASC Name:	Ujjwal Telecom	Dehradun
	Contact Person:	Mr.Roshan	
	Address	E-12, Janpath Shoping Complex ,Near Bindaal Bridge	
	Ph No:	9897388800	
	E-mail:	ujjwal.dehradun@lemonmobiles.com	
109	ASC Name:	Money Communication	Haridwar
	Contact Person:	Manish verma	
	Address:	C/O Connecting Communication, G76,new ansari market,	
		, Near P.N.B. gurudwara road, jawalapur	
	Ph No:	9368551976	
	E-mail:	money.haridwar@lemonmobiles.com	
110	ASC Name:	Jai Baba Electronics (UT)	Rudrapur
	Contact Person:	Mohit Rajput	
	Address:	H.No.G-26,1st Floor,Near Panch Mandir,(Udham Singh Nagar)	
	Ph No:	9927871661 ,05944242811	
	E-mail:	jai.rudrapur@lemonmobiles.com	
111	ASC Name:	Aman Electronics	Rudrapur

	Contact Person:	Mr.Aman	
	Address:	Aman Electonics, Main Market,	
		Bhalla Street, No.C - 21, Rudhrapur, (U.S. Nagar)U.K.	
	Ph No:	9012011234	
	E-mail:	aman.rud@lemonmobiles.com	
ZONE :	EAST		
STATE:	Assam		
112	ASC Name:	Speednet @ Ajmera	Dibrugarh
	Contact Person:	Mr. Kamal Kishore jain	
	Address:	Ajmera House, Thana Charali, Dibrugarh, Assam-786001	
	Ph No:	3732321761	
	E-mail:	speednet.dib@lemonmobiles.com	
113	ASC Name:	Perfect Solution	Guwahati
	Contact Person:	Mr. Shaukat Raushan	
	Address:	C/O Tanaaz Telecom, Baba Lokenath Complex,	
		SS Rd. , Lakhtokia, Guwahati - 781001	
	Ph No:	09864038167 09864085645	
	E-mail:	perfect.guw@lemonmobiles.com	
114	ASC Name:	B.S. Cell Point	Hojai
	Contact Person:	Mr. Bapan Saha	
	Address:	Dadabhai Shopping Center, Main Road , Hojai, Assam - 782435	
	Ph No:	3674250002	
	E-mail:	bscell.hoj@lemonmobiles.com	
115	ASC Name:	Mahabir electronics	Jorhat

			Assam
	Contact Person:	Avinash Dutta	
	Address:	Opp. Balaji canvas store, J.B.Road,	
	Ph No:	3762309796	
	E-mail:	mahabir.Jorhat@lemonmobiles.com	
116	ASC Name:	Digital World	
	Contact Person:	Mr. Raj kumar singha	
	Address:	Shop No 12B Raja Bazar Complex cicuit house Road OPP D. S. A Silchar	
	Ph No:	03842-260486, 09954160356, 03842-260283	
	E-mail:	digital.silchar@lemonmobiles.com	
117	ASC Name:	Netsol Tinsukhia	Tinsukhia
	Contact Person:	Mr. M.D. Shakil	
	Address	TDA Central Plaza, 1st Floor, Tinsukhia, Assam-786125	
	Ph No:	03742340428,	
	E-mail:	netsol.tin@lemonmobiles.com	
STATE:	Bihar		
118	ASC Name:	Baba Mobile Care	Ara
	Contact Person:	Binod Kumar Ojha	
	Address:	Pratap Palace, K.G. Road, Ara, Bihar	
	Ph No:		
	E-mail:	baba.ara@lemonmobiles.com	
119	ASC Name:	Ganpati Enterprises	Patna
	Contact Person:	Mr. Sushil Kumar Tiwary	
	Address:	207, Pandey Mall, Above Vishal	

		Mega Mart, Fraser Road , Patna - 800001	
	Ph No:	0612-3927296	
	E-mail:	ganpati.pat@lemonmobiles.com	
120	ASC Name:	B.M. Trading	Patna
	Contact Person:	Brajesh Kumar Singh	
	Address:	Shop No. 19, Kumar Tower, Boring Road Crossing,	
	Ph No:	9334908375	
	E-mail:	bm.patana@lemonmobiles.com	
121	ASC Name:	Vinayak Enterprises	Purnia
	Contact Person:	Mr. Raja	
	Address:	Rajni Chowk, Bhatta Bazar, Purmia	
	Ph No:	8051691791	
	E-mail:	vinayak.pur@lemonmobiles.com	
122	ASC Name:	S.B.D Enterprises	Katihar
	Contact Person:	Mr. Sunil Kumar Meghani	
	Address:	C/O Meghani Pay Phone, Binodpur, opp.krisha Agency, Katihar	
	Ph No:	06452-244617,09835273337	
	E-mail:	sbd.kat@lemonmobiles.com	
123	ASC Name:	Albaksh Enterprises	Kishanganj
	Contact Person:	Tarique Anwar	
	Address:	Dey Market, Kishanganj, Bihar	
	Ph No:		
	E-mail:	albaksh.kishanganj@lemonmobiles.com	
STATE:	Chhattisgarh		

124	ASC Name:	Vaishnavi International	Raipur
	Contact Person:	Mr. Nitin Sharma	
	Address:	Shop No. 7, Naveen Market,Near Phool Chowk	
	Ph No:	9424207574	
	E-mail:	vaishnavi.rajpur@lemonmobiles.com	
STATE:	Jharkhand		
125	ASC Name:	GLOBAL AUTOMATION	Dhanbad
	Contact Person:	Bijay Kumar Sen	
	Address:	LG-38A, Urmila Tower, Bank More, Dhanbad, Jharkhnad	
	Ph No:	9334965891; 9234394311	
	E-mail:	global.dhanbad@lemonmobiles.com	
126	ASC Name:	Digital Services	Hazaribagh
	Contact Person:	Mr.Shish Alam	
	Address:	Plaza Market, Near Kallu Chowk, Pugmill	
	Ph No:	9334486465	
127	ASC Name:	Bhaskar Telelink	Palamu
	Contact Person:	Mr. Shashikant Gupta	
	Address:	DR. J Dubey Complex, Shop No. 5, opp of Badi Masjid, Chhoumuhan Choek, Daltenganj	
	Ph No:	9430165753	
	E-mail:	bhaskar.pal@lemonmobiles.com	
128	ASC Name:	Cyber Communication	Ranchi
	Contact Person:	Mr. Arun kumar & mukesh kumar	

	Address:	Shop No. 54, Co-Operative Market Complex, Ashok Nagar.	
	Ph No:	9931373402	
	E-mail:	cyber.ran@lemonmobiles.com	
129	ASC Name:	K.N. Mobile	Ranchi
	Contact Person:	Mr Narendra	
	Address:	Sahid Chowk, Pustak Path	
	Ph No:	9835716059	
	E-mail:	kn.ran@lemonmobiles.com	
STATE:	Manipur		
130	ASC Name:	I R Enterprises	Imphal
	Contact Person:	Mr. Yambem Roshan Singh	
	Address:	Paona Bazar, Imphal-01 , 795001	
	Ph No:	3852444863	
	E-mail:	ir.imphal@lemonmobiles.com	
STATE:	Meghalaya		
131	ASC Name:	P.M Mobile Repairing center	Shillong
	Contact Person:	Mr. Nirmal Kumar Jain	
	Address:	Gulista Fancy Mkt GS Road Near Canara Bank	
	Ph No:	9436730283	
	E-mail:	pmmobile.shillong@lemonmobiles.com	
STATE:	Orissa		
132	ASC Name:	URA Mobiles	Balasore
	Contact Person:	Mr.Uttam Pal	
	Address:	Station Road, Near City Lodge	

	Ph No:	06782240430 9777981300	
	E-mail:	ura.bala@lemonmobiles.com	
133	ASC Name:	Orissa Enterprises	Berhampur
	Contact Person:	Mr.Anand	
	Address:	Park Street, Behrampur- 2	
	Ph No:	9337764456	
	E-mail:	orissa.berhampur@lemonmobiles.com	
134	ASC Name:	Swastik Infotech	Bhubaneswar
	Contact Person:	Mr. Chinmayananda	
	Address:	S-5, Griner Palace, Near Bus Stop, Bomikhal	
	Ph No:	9337707276	
	E-mail:	swastik.bhubaneswar@lemonmobiles.com	
135	ASC Name:	Channel - 4	
	Contact Person:	Mr.Murli Dhar Nayak	
	Address:	Singh Plaza Dolamundai, Cuttak	
	Ph No:	6713200797	
	E-mail:	channel.cutt@lemonmobiles.com	
136	ASC Name:	RT Mobile	Dhenkanal
	Contact Person:	Mr.Sangram Kumar panda	
	Address:	Mahabir bazar, D K Road, Dhenkanal, Orrisa - 759001	
	Ph No:	06762224907 ,09437187887	
	E-mail:	rt.hamir@lemonmobiles.com	
137	ASC Name:	Black Buck Digital Services	Rourkela
	Contact Person:	Biswajit Dash	

	Address:	1st floor, vedbigyan bhawan, shaktinagar	
	Ph No:	9861575707	
	E-mail:	black.rourkela@lemonmobiles.com	
138	ASC Name:	Shreevani Traders	Ryagada
	Contact Person:	Mr.K.Mitra Gupta	
	Address:	sreevani.traders@lemonmobiles.com	
	Ph No:	06856-224493	
	E-mail:	Hotel Kapilas lane, Opp ADB(SBI) New colony Ryagada	
STATE:	Tripura		
139	ASC Name:	Video S.R.	Agartala
	Contact Person:	Mr. Arunabha Saha	
	Address:	7, Melarmath, HGB Road, Tripura Pin-799001	
	Ph No:	9206040737	
	E-mail:	video.agartala@lemonmobiles.com	
STATE:	West Bengal		
140	ASC Name:	Rupa Telecom	Basirhat
	Address:	College Para Basirhat 24	
	Ph No:	9932460205	
141	ASC Name:	S B Communication	Berhampore
	Contact Person:	Mr. Mondal	
	Address:	3 , station Road, Berhampore.murshidabad	
	Ph No:	9734449611	

142	ASC Name:	R.K.Sales & Service	Birbhum
	Contact Person:	Rofecul Islam	
	Address:	Rampurhat New Bus Stand Rampurahat Birbhum	
	Ph No:	9732174962	
	E-mail:		
143	ASC Name:	Digitech Service	Durgapur
	Contact Person:	Mr. Pinto Chatterjee	
	Address:	J.K. Paul Lane,Benachity	
	Ph No:	3433295996	
	E-mail:	digitech.durgapur@lemonmobiles.com	
144	ASC Name:	Billenium Sales And Service	Kolkata
	Contact Person:	Mr. Sudip Mondal	
	Address:	6-Chowringhee Lane,Ground floor	
	Ph No:	3322861694	
	E-mail:	billenium.kolkata@lemonmobiles.com	
145	ASC Name:	JP MOB-TECH	Kolkata
	Contact Person:	Mr. Azizul Haque	
	Address:	Bishal Market, Barasat Near 12 No Rail Gate	
	Ph No:	3325241771	
	E-mail:	jpmobtech.kolkata@lemonmobiles.com	
146	ASC Name:	Subham Computers	Siliguri
	Contact Person:	Mr. Nawal Kishor Mishra	
	Address:	83, Bidhan Road Paul Building Complex 1st floor, Siliguri, Pin-734001	

	Ph No:	3532525624, 3532526250, 9832063336,	
	E-mail:	subham.siliguri@lemonmobiles.com	
ZONE :	SOUTH		
STATE:	Andhra Pradesh		
147	ASC Name:	R.K. Mobile Services	Ananthapur
	Contact Person:	Mr. Pavan Kumar	
	Address:	Shop No.10/442, Ist Floor, Opp. Big C Show Room, Subhash Road, Ananthapur.	
	Ph No:	9885908738	
148	ASC Name:	Bharathi Mobile shoppe	Ananthapur
	Contact Person:	Dhanunjaya Reddy	
	Address:	# 11/40, ladies club bldg, subash road, Anantapur -515 001	
	Ph No:		
	E-mail:	bharathi.ana@lemonmobiles.com	
149	ASC Name:	Hi Fi Mobile	Hyderabad
	Contact Person:	Mr.Satish Reddy	
	Address:	# 6-133 Opp: Hetero Pharmacy, Dwarkapuri colony,Chintal, Hyderabad.	
	Ph No:	9291503773	
	E-mail:	hifi.hyderabad@lemonmobiles.com	
150	ASC Name:	LAXMI SREENIVASA ENTERPRISES	KHAMMAM
	Contact Person:	Mr. V.MAHENDRANADHA REDDY	
	Address:		
	Ph No:	9440160600	

	E-mail:	mslaxmi.kha@lemonmobiles.com	
151	ASC Name:	S V Technologies	KADAPA
	Contact Person:	Ravikumar	
	Address:	Door No-1/331,Maruthi nagar,National lodge complex, Opp: New Apsrtc busstand ingate, Kadapa	
	Ph No:	09347251806 ,09959214052	
	E-mail:	sv.kad@lemonmobiles.com	
152	ASC Name:	Anwar Communication	Kurnool
	Contact Person:	Mr. Zakir	
	Address:	C/oANWAR MOBILES SERVICE CENTRE, Shop NO. 9 , Bhupal Complex , Park Road , Kurnool	
	Ph No:	9866026731	
	E-mail:	anwar.kur@lemonmobiles.com	
153	ASC Name:	Sagarika Technologies	
	Contact Person:	Mrs. Sagarika	
	Address:	# 2-8-40, Circus Ground Lane, Mukarampura, Karimnagar.	
	Ph No:	9346312345	
	E-mail:		
154	ASC Name:	Sri Chakra Mobile	Mahbub Nagar
	Contact Person:	Anil Kumar	
	Address:	Shop No. 4 , Shareef Complex , Nr. New Bus Stand, Mahbub nagar.	
	Ph No:	9849839004 ,08542221333	
	E-mail:	shri.mah@lemonmobiles.com	
155	ASC Name:	Sri Sai Communication	

	Contact Person:	Rajesh	
	Address:	Shop No. 08, Mounika Complex, Bellampally Chourasta,Mancheriyal.	
	Ph No:	9394143420	
156	ASC Name:	R.S. Communication	Nalgonda
	Contact Person:	Mr. Raju	
	Address:	M/s. R.S.Communications, # 6-5-3, Viswalaxmi Complex, Beside Aircel Office, Hyderabad Road, Nalgonda.	
	Ph No:	9885399868	
157	ASC Name:	M.V. Distributors	Nandyal
	Contact Person:	M. Chandramouli	
	Address:	# 3-185, Bairmal Street, Nandyal, Kurnool District.	
	Ph No:		
	E-mail:	mv.kur@lemonmobiles.com	
158	ASC Name:	Tirumalaa Electronics	Nellore
	Contact Person:	S. Naga Praveen	
	Address:	D.No. 16-2-268, Behind Mayuri Restaurant, Pogathota, Nellore	
	Ph No:	9347033153	
159	ASC Name:	Sri Chakra Mobiles Plaza	Ongole
	Contact Person:	Mr. K.Chakradhar	
	Address:	Sri Chakri Mobiles, C.V.N Complex, Beside Womens College, Sivalayam Road, Ongole.	
	Ph No:	9440650555	
160	ASC Name:	SRI SAI Comm.	Secunderabad

	Contact Person:	Mr.Mani	
	Address:	1-7-301, SHOP NO.-26, Hardy complex M.G.Road. Pin-500003	
	Ph No:		
	E-mail:	srisai.secundrabad@lemonmobiles.com	
161	ASC Name:	SAAROOPYA MOBILES	
	Contact Person:	Subramanyam	
	Address:	# 3-4-126,Beside janapriya bus stop, Annapurna colony,main road,Mallapur.	
	Ph No:	9849290916	
	E-mail:	mssaaroo.mall@lemonmobiles.com	
162	ASC Name:	New Vision Comm.	
	Contact Person:	Srinivasarao.B	
	Address:	Nehru Road, UPSTAIR Plastic World, Srikakulam. Pin-532001	
	Ph No:	08942-226121, 9346258121	
	E-mail:	newvision.Srikakulam@lemonmobiles.com	
163	ASC Name:	CMT COMMUNICATIONS	Triputhi
	Contact Person:	K.TEJA	
	Address:	# 13-7-796-14-B, TUDA OFFICE ROAD, TIRUPATHI	
	Ph No:	9393620209	
	E-mail:	cmt.tirupathi@lemonmobiles.com	
164	ASC Name:	Arun Cell Care	Visakhapatnam
	Contact Person:	N.G. Arun kumar swamy	
	Address:	D.no: 47-3-18/5, shop no: 05, Sri	

		nilaya complex, Dwaraka nagar 5th lane Pin-530016	
	Ph No:	9885036143	
	E-mail:	aruncell.visakhapatnam@lemonmobiles.com	
165	ASC Name:	Vashnavi Technologies	
	Contact Person:	V.Satyanarayana Rao	
	Address:	Flat no 105, Rajsree apartments, # 29-4-20, kodandaramireddy street, Beside Ing vysa bank, Governorpet.	
	Ph No:	0866-6631819, 09949941400	
	E-mail:	vashnavi.vija@lemonmobiles.com	
166	ASC Name:	Siri Agencies	Warangal
	Contact Person:	Mr. Raghu Babu	
	Address:		
	Ph No:	9346311223	
			Warangal
167	ASC Name:	S.S. Bharti Communication	
	Contact Person:	L. Sudarshan Rao	
	Address:	# 8-9-100/12, Victory Estate, J.P.N Road, Chourastha	
	Ph No:	9346552223	
	E-mail:	ss.war@lemonmobiles.com	
STATE:	Karnataka		
168	ASC Name:	S V Technology	Bangalore
	Contact Person:	BASAVARAJA M	
	Address:	651/B/17, 1st Main, D Block, 2nd Stage, Rajajinagar	
	Ph No:	8040946376	

169	ASC Name:	Maruthi Electronics	Bangalore
	Contact Person:		
	Address:	No. 578, 75th D Cross, 6th Block Rajaji Nagar	
	Ph No:	9845010035 ; 8023303429 ; 9886145790	
	E-mail:	maruthi.banglore@lemonmobiles.com	
170	ASC Name:	Karnataka Telecom	
	Address:	M.V. Extension, Near India Clinic, Gangammegudi Road Hoskote	Bangalore
	Ph No:	9986431471	
	E-mail:	karnataka.ban@lemonmobiles.com	
171	ASC Name:	M S N COMMUNICATION	Bangalore
	Contact Person:	Jaffar Shariff	
	Address:	#32, Shop No.3, Arvind Complex, Beside Sanimahatma Temple (Near Banashankari Temple) Banashankari, Kanakapura Road, Bangalore	
	Ph No:	8032557333	
	E-mail:	msn.bangalore@lemonmobiles.com	
172	ASC Name:	My Mobile Care	Bangalore
	Contact Person:	Praveen / Kumar	
	Address:	1st Floor , 286/1 , Begur Road, Bommanahalli, Bangalore - 560068	
	Ph No:	9341333512	
	E-mail:	mymobile@lemonmobiles.com	
173	ASC Name:	Mobile World	Bhatkal
	Contact Person:	T S AZEEM	

	Address:	MOBILE WORLD S H COMPLEX NAWAYATH COLONY	
	Ph No:	9845532167	
	E-mail:	mobile.bhatkal@lemonmobiles.com	
174	ASC Name:	Mobile Solutions	Bijapur
	Contact Person:	PRASHANT	
	Address:	Opp. Ram Mandir, Ram Mandir Road	
	Ph No:	9945622345	
	E-mail:	mobile.bijapur@lemonmobiles.com	
175	ASC Name:	N R Marketing	Davangere
	Contact Person:	Mr.N R Rafi	
	Address:	#8, Muslim hostel complex, KEB circle, Davangere - 577 004	
	Ph No:	9845457241	
	E-mail:	nr.dava@lemonmobiles.com	
			Gulbarga
176	ASC Name:	ACE COMMUNICATION	
	Contact Person:	Mr.Deepak Ronad	
	Address:	Beside Sangameshwar Kalyan Mandap, S B Temple Road	
	Ph No:	8472230002	
177	ASC Name:	Sri Sangameshwar Communication	Gulbarga
	Contact Person:	Mr. Basava reddy	
	Address:	Near Madan talkies, Johar galli, Gulbarga - 585104	
	Ph No:	9632233383	
	E-mail:	srisanga.gul@lemonmobiles.com	
178	ASC Name:	Nayana Enterprise	Hubli
	Contact Person:	Mr. Reddy	

	Address:	G-28,Eureka Centre,Kopikkar road Hubli-20	
	Ph No:	9945698626	
	E-mail:	nayana.hub@lemonmobiles.com	
179	ASC Name:	Cell-N-Care	Karwar
	Contact Person:	Satish V.Bhatkal	
	Address:	G-01, Shivdad Appartment,Opp. Maladevi Ground, Main Road	
	Ph No:	9844061001	
	E-mail:	cell.karwar@lemonmobiles.com	
180	ASC Name:	Chinmaya Mobile	Kolar
	Contact Person:	Mr. Chandrasekar	
	Address:	Sharda talkies road, Bazar street, Kolar	
	Ph No:	09902227271 9342856007	
	E-mail:	chinmaya.kol@lemonmobiles.com	
181	ASC Name:	Padmashree Enterprise	Mangalore
	Contact Person:	Mr.Prabhakar shetty	
	Address:	No.406, 2nd floor, Kunil centre, Hampankatta, Mangalore-1	
	Ph No:	8242442820	
	E-mail:	padma.mang@lemonmobiles.com	
182	ASC Name:	M.Gouse Mobile Service Centre	Mudhol
	Contact Person:	Mr. Mahammadgouse	
	Address:	Anjuman Complex, Shop No.- 26 Near Bus stand, Mantur road, Pin-587313	
	Ph No:	9663335556	
	E-mail:	mgouse.mudhol@lemonmobiles.com	

183	ASC Name:	Canara Telecommunication	Mysore
	Contact Person:	Mr. Rajesh	
	Address:	1225, 1st cross, Krishnamurthy Puram, Opp. Vjasaraj Mutt	
	Ph No:	9845097967	
	E-mail:	canara.mysore@lemonmobiles.com	
184	ASC Name:	Cell Solutions	Shimoga
	Contact Person:	SREENAG.S.N	
	Address:	3rd Cross, Durgigudi,Park Extension.	
	Ph No:	9844174143	
	E-mail:	cell.shimoga@lemonmobiles.com	
185	ASC Name:	NAGASHREE COMMUNICATIONS	Udupi
	Contact Person:	Mr. Mahesh	
	Address:	Shopno-6, 1st, floor, Naraharicomplex, Kalsanka	
	Ph No:	9241462068 ; 8202525692	
	E-mail:	nagashree.udupi@lemonmobiles.com	
STATE:	Kerela		
186	ASC Name:	Mobile Lab	Calicut
	Contact Person:	Prabeesh	
	Address:	Darusalam Complex, L.G. Road	
	Ph No:	495304532	
187	ASC Name:	Ideal infocomm	Kollam
	Contact Person:	Mr.Syam	
	Address:	NO-17,ARA,NEAR KADAKOL TEMPLE	

	Ph No:	9249411422	
	E-mail:	ideal.koll@lemonmobiles.com	
188	ASC Name:	SKYCELL	Kollam
	Contact Person:	Rasaludeen	
	Address:	MUTHOOT CHAMBERS, VADAYATTUKOTTA ROAD,KOLLAM - 691001	
	Ph No:	9846108531	
	E-mail:	skycell.kollam@lemonmobiles.com	
STATE:	Tamil Nadu		
189	ASC Name:	Bhavani	
	Contact Person:	K.K Swamy	
	Address:	No. 400/A, Mettur Main Road, Bhavani	
	Ph No:	9629576666	
190	ASC Name:	Mobile India	Chennai
	Contact Person:	T.RAVI	
	Address:	9,GST ROAD	
	Ph No:	65154215	
191	ASC Name:	Systamatic Communication	Chennai
	Contact Person:	Mr.Venkatesh	
	Address:	Old NO.36,New No.30, Azizmulk 1st street, Thousandlight, Chennai-600006	
	Ph No:	9840567556	
	E-mail:	systamatic.chennai@lemonmobiles.com	
192	ASC Name:	SRK Micro Mobile	Coimbatore

	Contact Person:	P.Rajkumar	
	Address:		
	Ph No:	09345526909, 09894211383	
	E-mail:	srk.coimbatore@lemonmobiles.com	
193	ASC Name:	Sri Vishnu Agency	Dharmapuri
	Contact Person:	Mr.Sugavaneswaran	
	Address:		
	Ph No:	9965379601	
	E-mail:	sreedevi.dhar@lemonmobiles.com	
194	ASC Name:	Sri Sai Enterprises	Pondicherry
	Contact Person:	D.Durai	
	Address:	83, Thennansalai Road, Sanjay Ghandhi Nagar, Pondicherry-13,	
	Ph No:		
	E-mail:	srisai.pondicherry@lemonmobiles.com	
195	ASC Name:	Allied Electronics	
	Contact Person:	Mr. Thomas Jacob	Salem
	Address:	266C, Advaida Ashram Roads, Near New Bus Stand	
	Ph No:	9842446067	
	E-mail:	allied.salem@lemonmobiles.com	
196	ASC Name:	Kumar Mobile Care	Theni
	Contact Person:	K.chellapondi	
	Address:	51, Dhanush Complex, Kappan st, Theni-625531. (Tamilnadu).	
	Ph No:	9842349081	
	E-mail:	kumarmobile.theni@lemonmobiles.com	

197	ASC Name:	South India Solutions	Vellore
	Contact Person:	Mr. Athaulla	
	Address:	V.A.G.Complex (Near Palace Cafe) 27, Katpadi Road, Vellore Pin-632004	
	Ph No:	9865804191	
	E-mail:	south.vellore@lemonmobiles.com	
ZONE :	WEST		
STATE:	Goa		
198	ASC Name:	Unique Tele Services	Margao
	Contact Person:	PARMANAND TELAGINAMANI	
	Address:	A-19, Basement, Osia Commercial Arcade, Near KTC Bus Stand	
	Ph No:	9326139768	
	E-mail:	unique.margao@lemonmobiles.com	
STATE:	Gujrat		
199	ASC Name:	S K Services	Ahmedabad
	Contact Person:	Rachana K Patel	
	Address:	214, Prathibha Complex , 2nd Floor Opposite , Gandhigram Railway Station Ellisbridage Ahmedabad	
	Ph No:	9601436500	
	E-mail:	skservices.ahmedabad@lemonmobiles.com	
200	ASC Name:	Jay Zulelal Telecom	Anand
	Contact Person:	Ramesh Bhai	
	Address:	24, Apna Bazar, Muncipal Shopping Center, Near Ice Factory, Anand,	

		Gujrat	
	Ph No:	9998799987	
	E-mail:	jayzulelal.anand@lemonmobiles.com	
201	ASC Name:	MOBITEL SERVICES	Bhavnagar
	Contact Person:	Mihir Bhai	
	Address:	GF-21, Business Centre, Rupam Chowak, Bhavnagar, Gujrat	
	Ph No:	9825453555	
	E-mail:	mobitel.bhavnagar@lemonmobiles.com	
202	ASC Name:	Padmavati Communication	Godhra
	Contact Person:	Mr. Manas Maheshkumar Shah	
	Address:	GF-7, B N Chambers, Nr Police Headquarters, Godhra	
	Ph No:	9428545305	
203	ASC Name:	Kash Peripherals	Surat
	Contact Person:	Upendra rangrej	
	Address:	06/669, Lal Darwaja, Moti Sheri	
	Ph No:	9824112347	
	E-mail:	kash.surat@lemonmobiles.com	
204	ASC Name:	Krishna Mobiles	Vadodra
	Contact Person:	Mr. Keyur Ghandhi	
	Address:	GF-23, Blue Diamond Complex, Fatehganj	
	Ph No:	9898040108	
STATE:	Madhya Pradesh		
205	ASC Name:	Poojya Enterprises	Bhopal

	Contact Person:	ASHISH DWIVEDI	
	Address:	UG-2, Radhye Krishna Complex, M.P. Nagar, Zone -II, Bhopal	
	Ph No:	9425675176	
	E-mail:	poojya.bhopal@lemonmobiles.com	
206	ASC Name:	Sonu Mobile & Repairing Center	Gwalior
	Contact Person:	Mr. Ashish Gupta	
	Address:	126, Mayur Market Thatipur Morar	
	Ph No:	93012-53659	
	E-mail:	sonumobile.gwalior@lemonmobiles.com	
207	ASC Name:	IT Care	Indore
	Contact Person:	ATISHAY POSERIA	
	Address:	LG-2, Trade Centre,18, South Tukoganj	
	Ph No:	9826095961	
	E-mail:	it.indore@lemonmobiles.com	
208	ASC Name:	Diwakar Agencies	Jabalpur
	Contact Person:	Preeti & Seema	
	Address:	G-14, Jayanti Complex, Marhatal	
	Ph No:	9203882833	
209	ASC Name:	Sky technologies	Ratlam
	Contact Person:	Rajiv Gandhi Civic Center, New road Ratlam	
210	ASC Name:	Neeta Computers	Sagar
	Contact Person:	Ramesh	
	Address:	Hanuman Mandir Gali-5, Civil Lines	
	Ph No:	07582) - 304007, 8085805005	
	E-mail:	neeta.sagar@lemonmobiles.com	

STATE:	Maharastra		
211	ASC Name:	Abhi Services	AHMEDNAGAR
	Contact Person:	Mr. Anil B Apte	
	Address:	B-4, Adarsh Sammrudhi Appt, Near Choupati Karanja	
	Ph No:	2412320078	
			Aurangabad
212	ASC Name:	Unique Telematics	
	Contact Person:	Mr. Mahesh	
	Address:	Shop No. 108/B, Tapadiya Super Market, Behind Sajawat Handlooms, Nirala Bazaar	
	Ph No:	2402356447	
	E-mail:	unique.aurangabad@lemonmobiles.com	
213	ASC Name:	Limra Mobiles	Jalgaon
	Contact Person:	Mr. Wasim Sayyed	
	Address:	45 A, E-Wing, First Floor, Golani Market, Jalgaon.	
	Ph No:	9370110092	
	E-mail:	limra.jalgaon@lemonmobiles.com	
214	ASC Name:	The Skylark Associates	Kalyan
	Contact Person:	Mr.Ejazuddin Qamruddin Sayed	
	Address:	Shop No.9, Bindu Tower,Opposite Old Lourdes High School & Vijay Sales,Santoshi Mata Road,Kalyan (west) Kalyan421 301	
	Ph No:	9321616800	
	E-mail:	theskylark.kalyan@lemonmobiles.c	

		om	
215	ASC Name:	Krisna Computer	Latur
	Contact Person:	Mr. Manoj b. Tiwari	
	Address:	NEW GANDHI MARKET COMPLEX NO.112, SHO NO. 180, BESIDE INDIRA MAHILA BANK, LATUR	
	Ph No:	02382-248283	
	E-mail:	krisna.latur@lemonmobiles.com	
216	ASC Name:	Fraslin Tech Care Pvt. Ltd.	Mumbai
	Address:	104 rajshree Plaza, L.B.S. Marg, Ghatkopar West	
217	ASC Name:	Serwings Enterprises	Nasik
	Address:	Shop No. 8, Ground Floor, Kapote - Meher, Renuka Nagar, Wadala Naka Near Dearka	
	Ph No:	09370969412, 09371531078	
	E-mail:	serwings.nasik@lemonmobiles.com	
218	ASC Name:	Sai Telecom	Panvel
	Contact Person:	Mr. Pardeepkumar Ishwar Mote	
	Address:	Shop No.148, Building No.1/2, Muncipal Complex Mall, Near Shivaji Chowk, Old Panvel(MH)-410206	
	Ph No:	9967965370	
	E-mail:	sai.pan@lemonmobiles.com	
219	ASC Name:	Reliable Enterprises	Pune
	Contact Person:	Linu Thomas	
	Address:	A-27, Jai Ganesh Vision, Akurdi	
	Ph No:	9028077345	

	E-mail:		
220	ASC Name:	Viraj Communication & Gift Articals	Pune
	Contact Person:	Sandeep Mate/Raju	
	Address:	Shukarawar Peth, Shivaji road, Near Vanraj Mandal, pune , Maharashtra-411002	
	Ph No:	9890139351	
	E-mail:	viraj.pune@lemonmobiles.com	
221	ASC Name:	Samiksha Cell Care	Sangli
	Contact Person:	Nitin Harlikar	
	Address:	Ghotkhinde Bullding Tilak Chowk Harbhat Road Sangli 416 416	
	Ph No:	9923320266	
222	ASC Name:	Yaadein Communication	Satara
	Contact Person:	Mr.SANDEEP SHIRKE	
	Address:	Yaadein Communication, Satara, Maharastra.	
	Ph No:	09021740791 9371625242	
	E-mail:	yaadein.satara@lemonmobiles.com	
223	ASC Name:	Varad Electronics	Thane
	Contact Person:	Mr Hitendra Zope	
	Address:	5, gautam Darshan Bulding, Ednlji Road, Charai	
	Ph No:	9320488835	
	E-mail:	varad.thane@lemonmobiles.com	